


Electric Actuators

Guide Rod Type


Series LEYG

Step Motor (Servo/24 VDC)

Servo Motor (24 VDC)

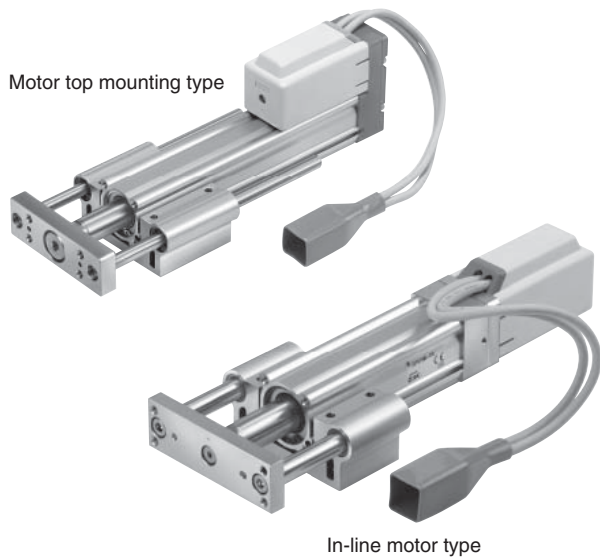

AC Servo Motor

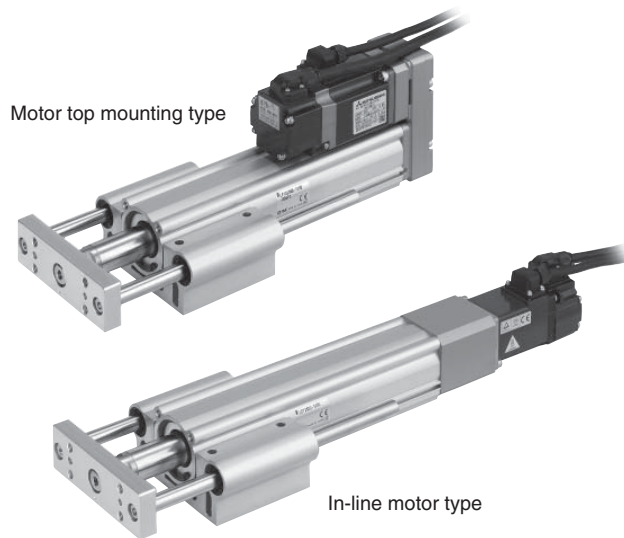

LEFS
LEFB

LEJS
LEJB

LEL

LEM

LEYG
LEYG

LES
LESH

LEPY
LEPS

LER

LEH

LEY-X5

11-LEFS

11-LEJS

25A-

LEC□

LECS□

LECSS-T


LECYM
LECYU

Motorless

LAT3

Model Selection

Series **LEYG** ▶ Page **275**

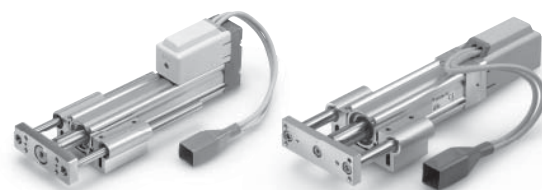

Moment Load Graph


Selection conditions

Mounting position	Vertical	Horizontal	
Max. speed [mm/s]	“Speed–Vertical Work Load Graph”	200 or less	Over 200
Graph (Sliding bearing type)	①, ②	⑤, ⑥*	—
Graph (Ball bushing bearing type)	③, ④	⑦, ⑧	⑨, ⑩

* For the sliding bearing type, the speed is restricted with a horizontal/moment load.


Vertical Mounting, Sliding Bearing

① 70 mm stroke or less

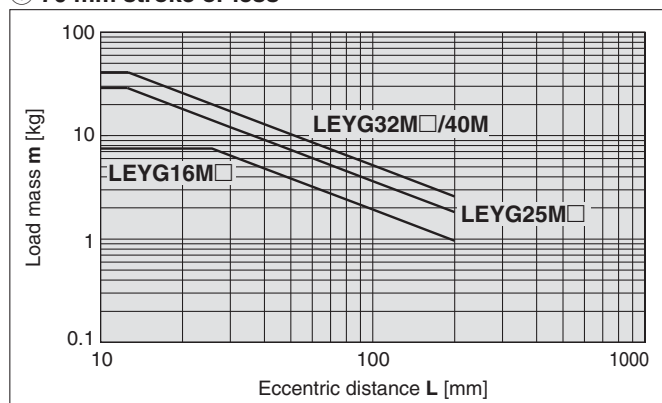


* The limit of vertical load mass varies depending on “lead” and “speed”.
Check “Speed–Vertical Work Load Graph” on pages 265 to 267.

② Over 75 mm stroke

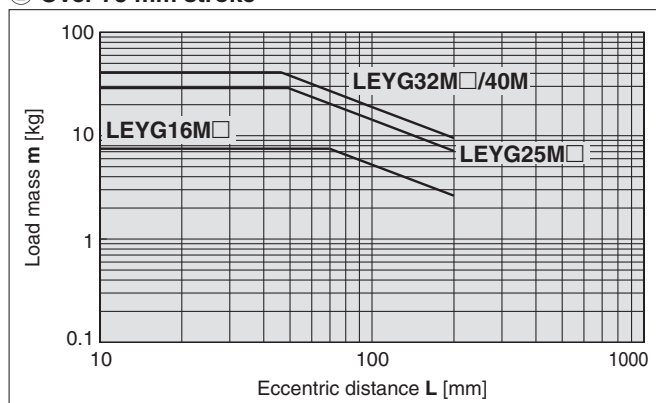


Vertical Mounting, Ball Bushing Bearing

③ 35 mm stroke or less

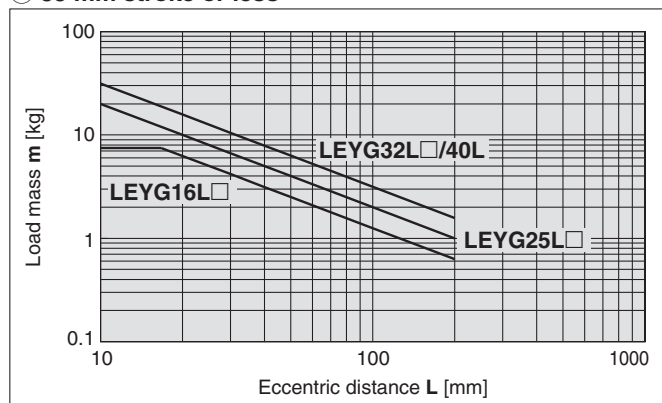

* The limit of vertical load mass varies depending on “lead” and “speed”.
Check “Speed–Vertical Work Load Graph” on pages 265 to 267.


④ Over 40 mm stroke

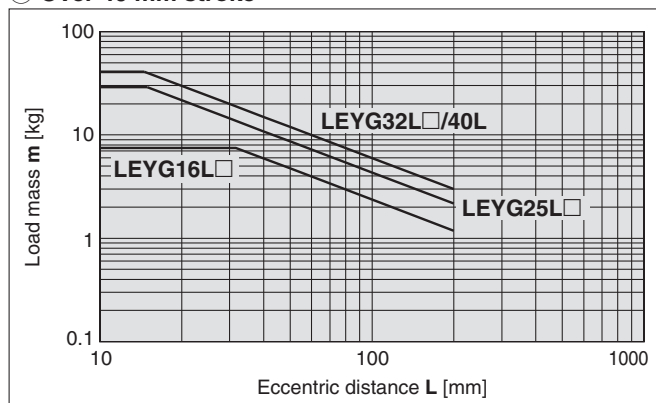


Moment Load Graph

Horizontal Mounting, Sliding Bearing

⑤ L = 50 mm

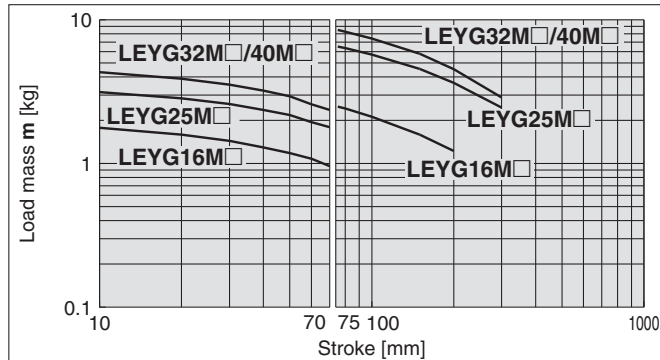

⑥ L = 100 mm

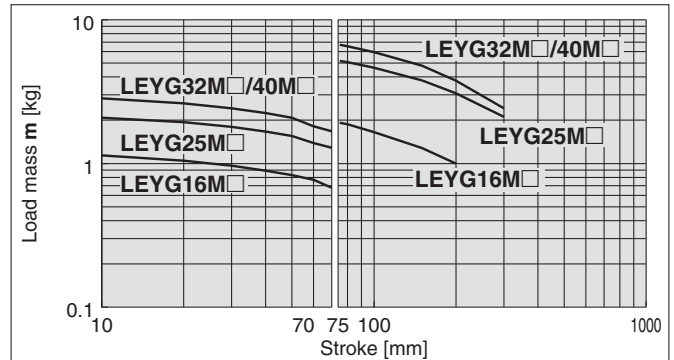

* Set the speed to less than or equal to the values shown below.


Motor type	LEYG□M□A	LEYG□M□B	LEYG□M□C
Step motor (Servo/24 VDC)	200 mm/s	125 mm/s	75 mm/s
Servo motor (24 VDC)	200 mm/s	200 mm/s	125 mm/s

* For the specifications below, operate the system at the "load mass" shown in the graph x 80%.


- LEYG25MAA/Servo motor (24 VDC), Lead 12

Horizontal Mounting, Ball Bushing Bearing


⑦ L = 50 mm Max. speed = 200 mm/s or less

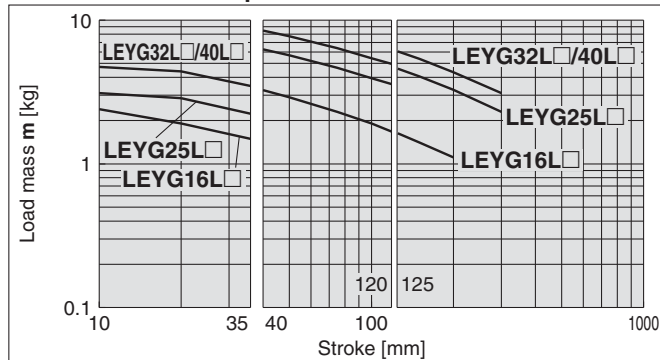


⑧ L = 100 mm Max. speed = 200 mm/s or less

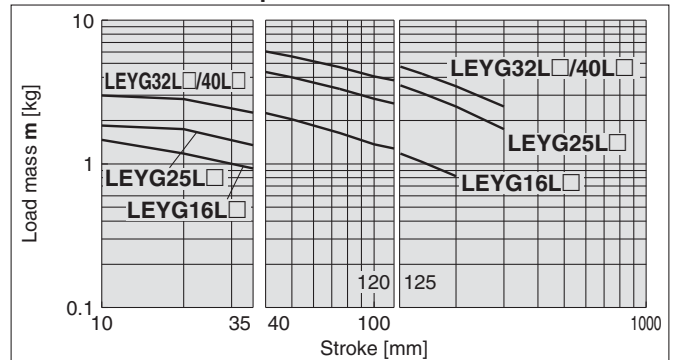

⑨ L = 50 mm Max. speed = Over 200 mm/s

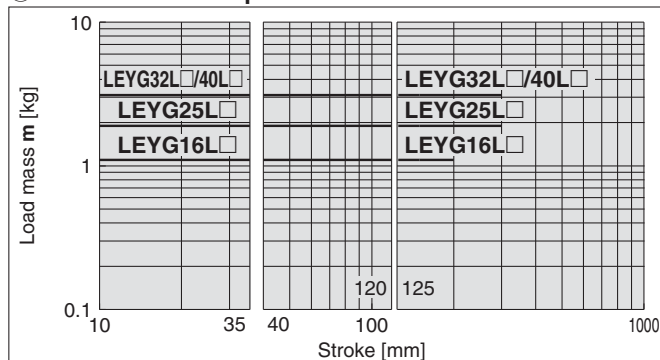


⑩ L = 100 mm Max. speed = Over 200 mm/s

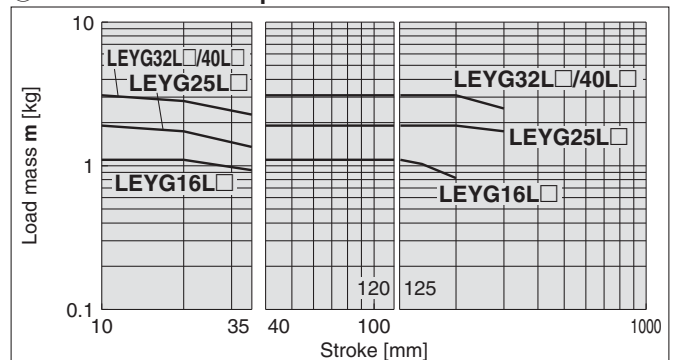

Operating Range when Used as Stopper



LEYG□M (Sliding bearing)



⚠ Caution

Handling Precautions

- Note 1) When used as a stopper, select a model with strokes 30 mm or less.
- Note 2) LEYG□L (ball bushing bearing) cannot be used as a stopper.
- Note 3) Workpiece collision in series with guide rod cannot be permitted (Fig. a).
- Note 4) The body should not be mounted on the end. It must be mounted on the top or bottom (Fig. b).

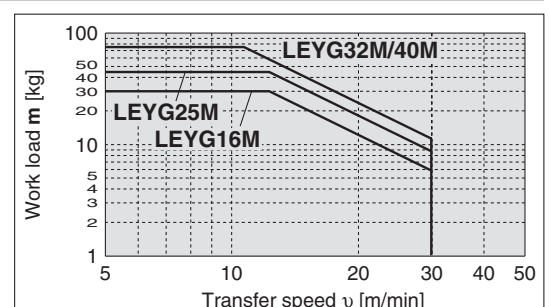

Series LEYG

Step Motor (Servo/24 VDC)


Servo Motor (24 VDC)

Speed-Work Load Graph (Guide) For Step Motor (Servo/24 VDC) LECP6, LECP1, LECPMJ


Refer to page 266 for the LECPA
and page 267 for the LECA6.

Horizontal


LEYG16^M_L □ for acceleration/deceleration: 2000 mm/s²

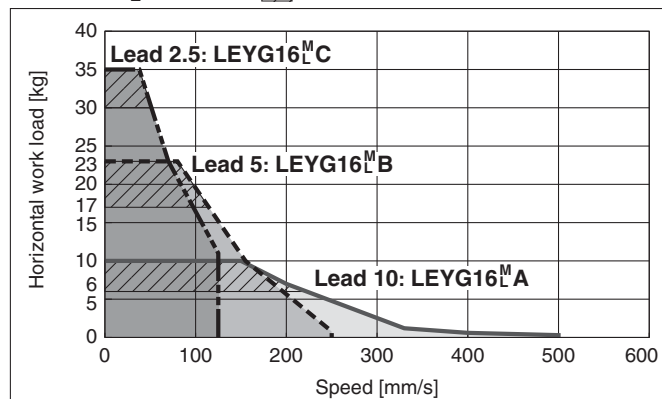


LEYG25^M_L □ for acceleration/deceleration: 2000 mm/s²

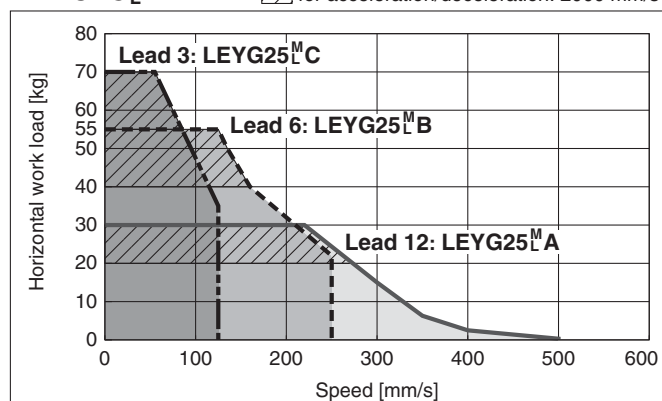

LEYG32^M_L □ for acceleration/deceleration: 2000 mm/s²

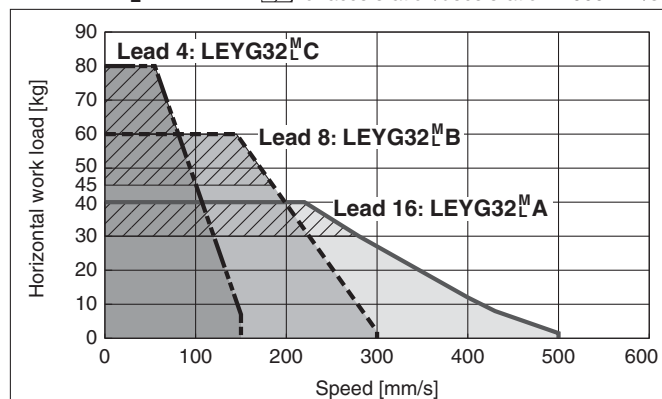


LEYG40^M_L □ for acceleration/deceleration: 2000 mm/s²

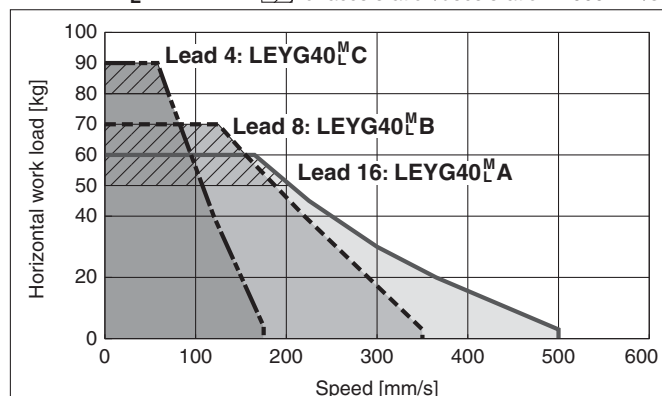


Vertical


LEYG16^M_L □

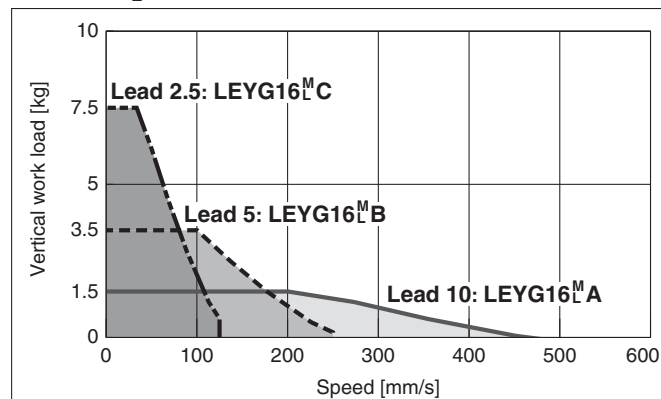


LEYG25^M_L □

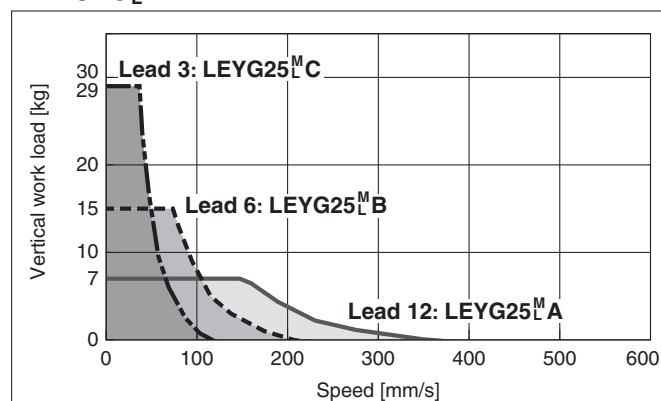

LEYG32^M_L □

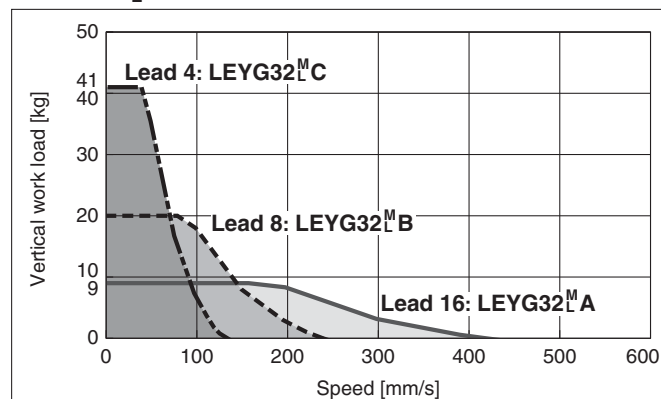

LEYG40^M_L □

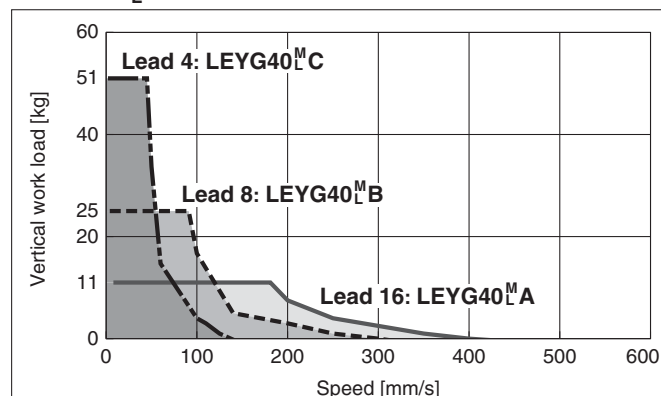


Refer to page 265 for the LECP6, LECP1, LECPMJ, and page 267 for the LECA6.


Speed-Work Load Graph (Guide) For Step Motor (Servo/24 VDC) LECPA

Horizontal


LEYG16^M ☐ for acceleration/deceleration: 2000 mm/s²

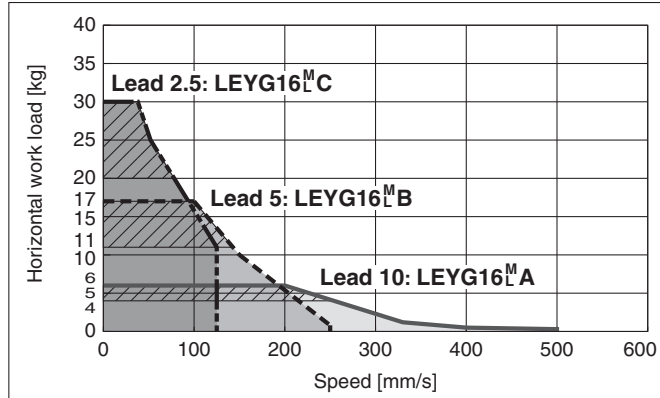


LEYG25^M ☐ for acceleration/deceleration: 2000 mm/s²

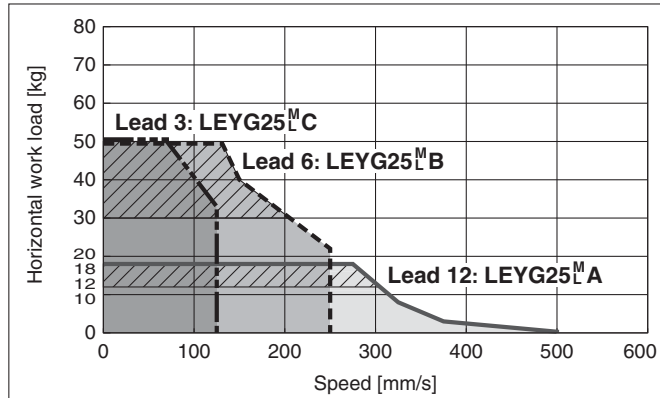

LEYG32^M ☐ for acceleration/deceleration: 2000 mm/s²

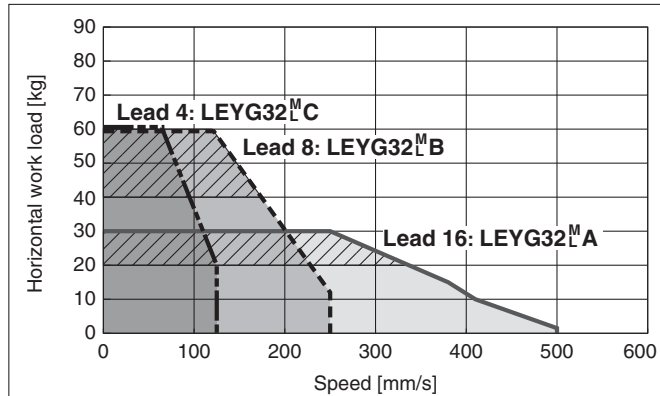


LEYG40^M ☐

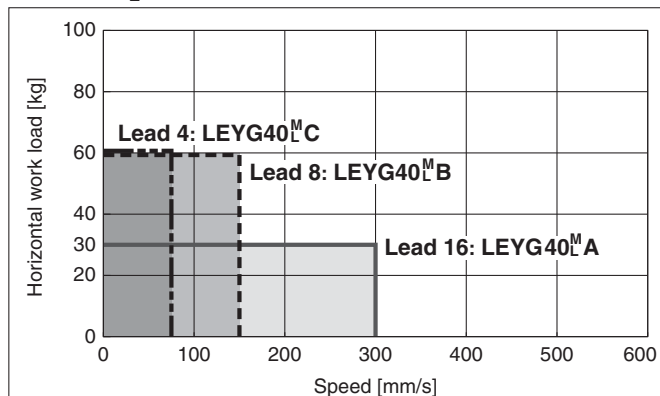


Vertical


LEYG16^M ☐

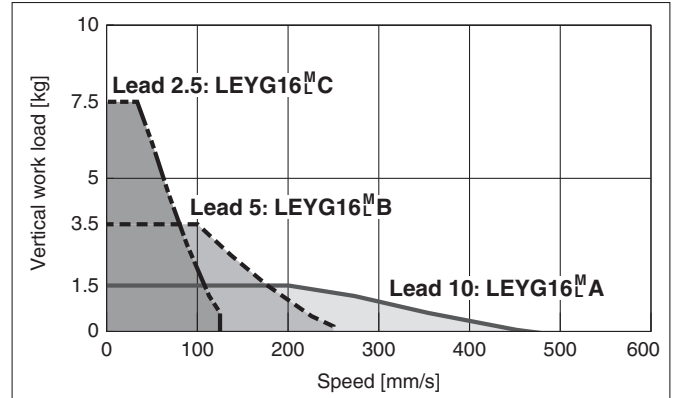


LEYG25^M ☐

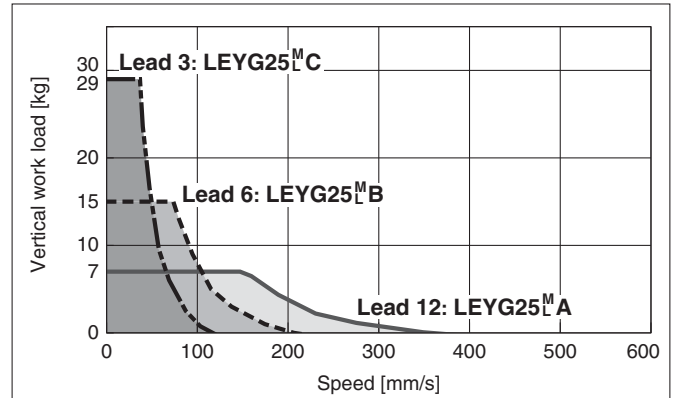

LEYG32^M ☐

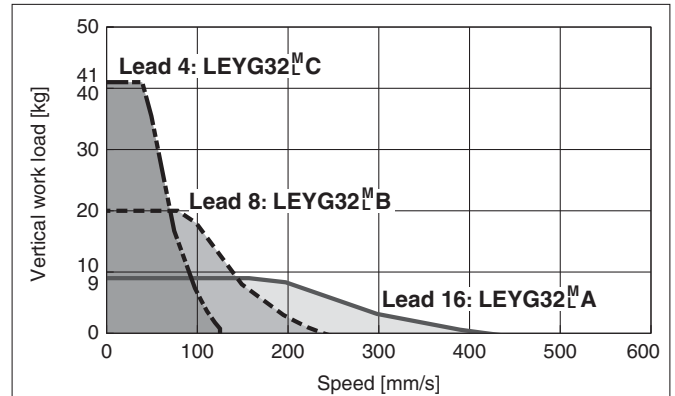


LEYG40^M ☐

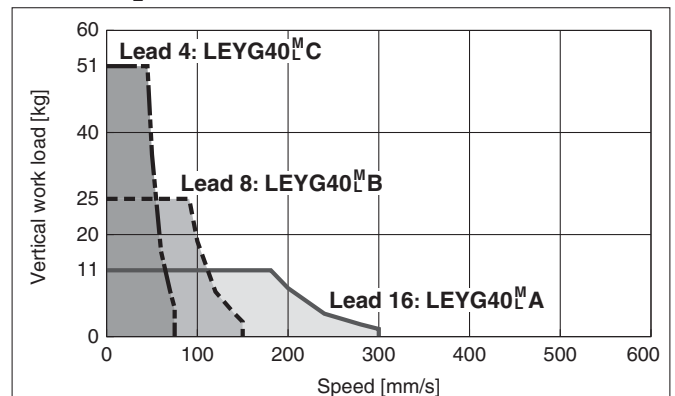


Speed-Work Load Graph (Guide) For Servo Motor (24 VDC) LECA6

Horizontal

LEYG16^MA□

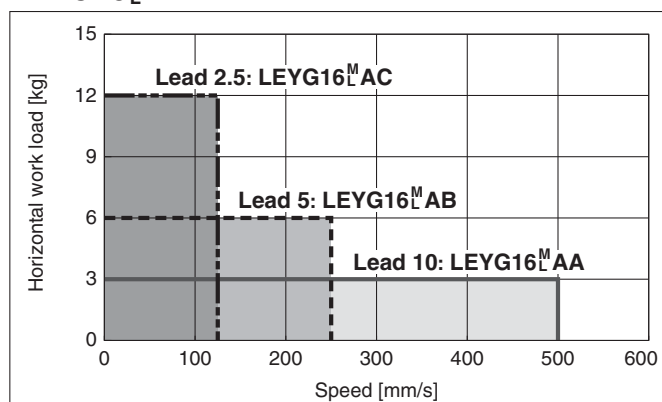


LEYG25^MA□

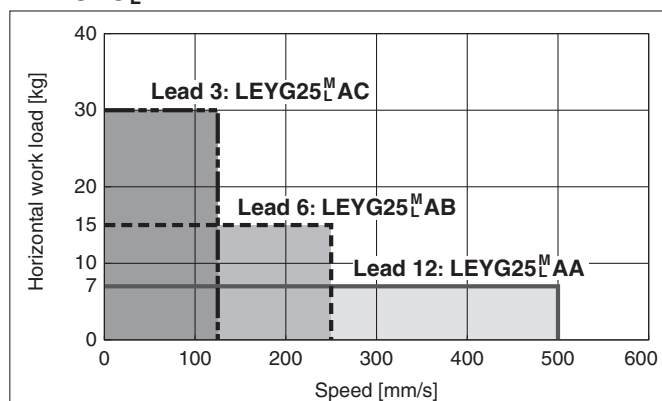


Vertical

LEYG16^MA□

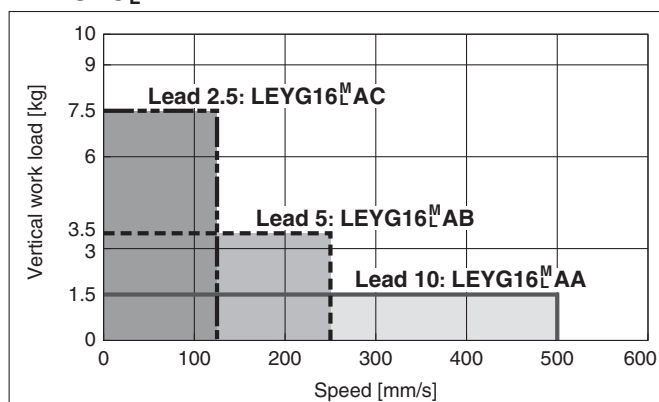


LEYG25^MA□

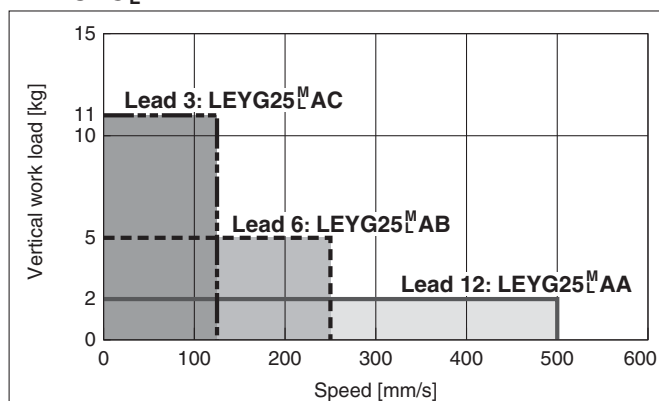

Force Conversion Graph (Guide)


Step Motor (Servo/24 VDC)

LEYG16^M_L□

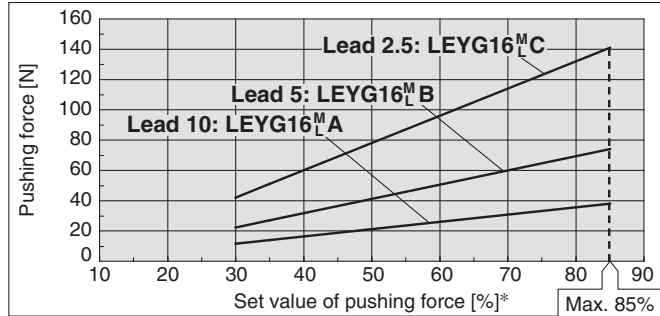


Ambient temperature	Set value of pushing force [%]	Duty ratio [%]	Continuous pushing time [minute]
25°C or less	85 or less	100	—
40°C	40 or less	100	—
	50	70	12
	70	20	1.3
	85	15	0.8

LEYG25^M_L□

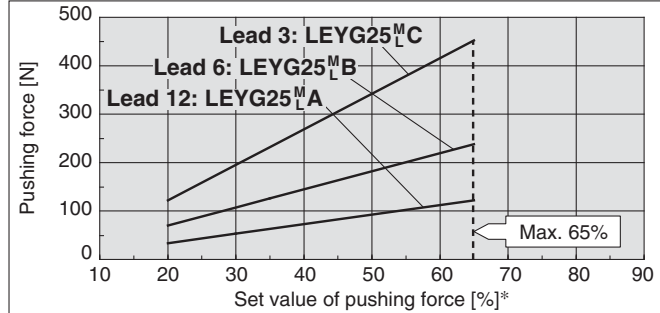


Ambient temperature	Set value of pushing force [%]	Duty ratio [%]	Continuous pushing time [minute]
40°C or less	65 or less	100	—

LEYG32^M_L□

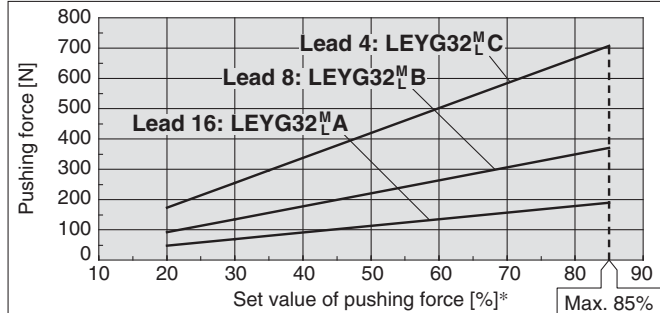

Ambient temperature	Set value of pushing force [%]	Duty ratio [%]	Continuous pushing time [minute]
25°C or less	85 or less	100	—
40°C	65 or less	100	—
	85	50	15

LEYG40^M_L□

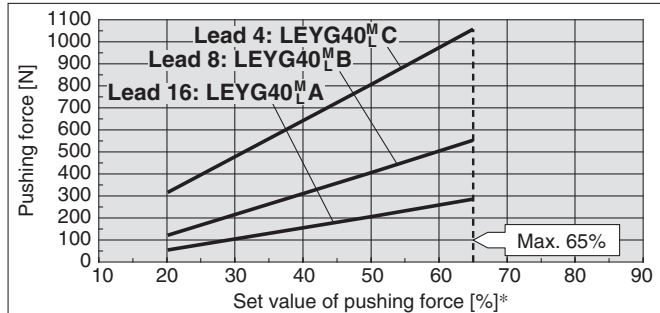


Ambient temperature	Set value of pushing force [%]	Duty ratio [%]	Continuous pushing time [minute]
40°C or less	65 or less	100	—

* Set values for the controller.


Servo Motor (24 VDC)

LEYG16^M_LA□

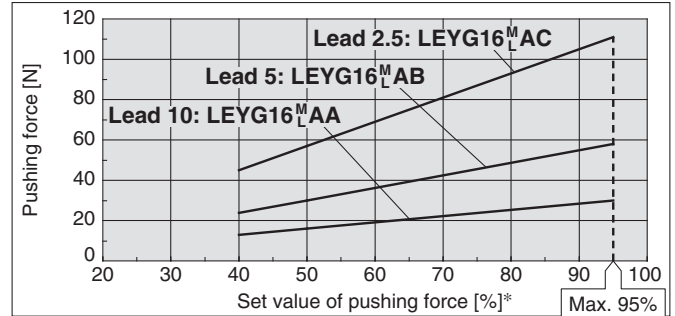

Ambient temperature	Set value of pushing force [%]	Duty ratio [%]	Continuous pushing time [minute]
40°C or less	95 or less	100	—

LEYG25^M_LA□

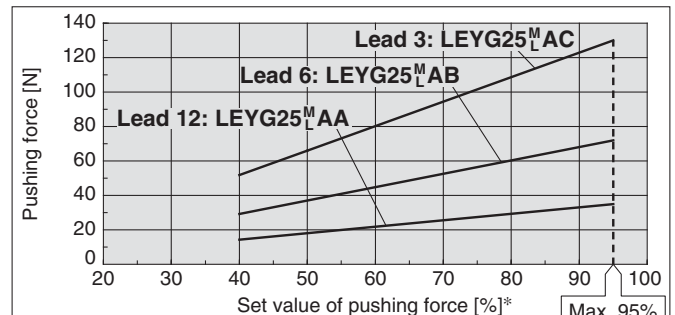

Ambient temperature	Set value of pushing force [%]	Duty ratio [%]	Continuous pushing time [minute]
40°C or less	95 or less	100	—

<Pushing Force and Trigger Level Range> Without Load

Model	Pushing speed [mm/s]	Pushing force (Setting input value)	Model	Pushing speed [mm/s]	Pushing force (Setting input value)
LEYG16 ^M _L □	1 to 4	30% to 85%	LEYG16 ^M _L A□	1 to 4	40% to 95%
	5 to 20	35% to 85%		5 to 20	60% to 95%
	21 to 50	60% to 85%		21 to 50	80% to 95%
LEYG25 ^M _L □	1 to 4	20% to 65%	LEYG25 ^M _L A□	1 to 4	40% to 95%
	5 to 20	35% to 65%		5 to 20	60% to 95%
	21 to 35	50% to 65%		21 to 35	80% to 95%
LEYG32 ^M _L □	1 to 4	20% to 85%	* The pushing force in the table shows the range within which the completion signal [INP] is normally output. If the product is operated outside this range (low pushing force), the [INP] signal may be output when the actuator is moving (before pushing).		
	5 to 20	35% to 85%			
	21 to 30	60% to 85%			
LEYG40 ^M _L □	1 to 4	20% to 65%			
	5 to 20	35% to 65%			
	21 to 30	50% to 65%			

<Set Values for Vertical Upward Transfer Pushing Operation>

For vertical loads (upward), set the pushing force to the maximum value shown below, and operate at the work load or less.

Model	LEYG16 ^M _L □	LEYG25 ^M _L □	LEYG32 ^M _L □	LEYG40 ^M _L □	LEYG16 ^M _L A□	LEYG25 ^M _L A□
Lead	A B C	A B C	A B C	A B C	A B C	A B C
Work load [kg]	0.5 1 2.5	1.5 4 9	2.5 7 16	5 12 26	0.5 1 2.5	0.5 1.5 4
Pushing force	85%	65%	85%	65%	95%	95%

LEFS
LEFB

LEJS
LEJB

LEL

LEM

LEY
LEYG

LES
LESH

LEPY
LEPS

LER

LEH

LEY-X5

11-LEFS

11-LEJS

25A-

LEC□

LECS□

LECS-T

LECYM
LECYU

Motorless


LAT3

Series LEYG

Step Motor (Servo/24 VDC)

Servo Motor (24 VDC)


Allowable Rotational Torque of Plate

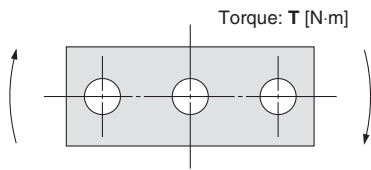

T [N·m]


Model	Stroke [mm]				
	30	50	100	200	300
LEYG16M	0.70	0.57	1.05	0.56	—
LEYG16L	0.82	1.48	0.97	0.57	—
LEYG25M	1.56	1.29	3.50	2.18	1.36
LEYG25L	1.52	3.57	2.47	2.05	1.44
LEYG32M	2.55	2.09	5.39	3.26	1.88
LEYG32L	2.80	5.76	4.05	3.23	2.32
LEYG40M	2.55	2.09	5.39	3.26	1.88
LEYG40L	2.80	5.76	4.05	3.23	2.32

Non-rotating Accuracy of Plate



Size	Non-rotating accuracy θ	
	LEYG□M	LEYG□L
16	0.06°	0.05°
25		0.04°
32	0.05°	
40		

Plate Displacement: δ



[mm]

Model	Stroke [mm]				
	30	50	100	200	300
LEYG16M	±0.20	±0.25	±0.24	±0.27	—
LEYG16L	±0.13	±0.12	±0.17	±0.19	—
LEYG25M	±0.26	±0.31	±0.25	±0.38	±0.36
LEYG25L	±0.13	±0.13	±0.17	±0.20	±0.23
LEYG32M	±0.23	±0.29	±0.23	±0.36	±0.34
LEYG32L	±0.11	±0.11	±0.15	±0.19	±0.22

LAT3

Motorless

LECYM
LECYU

LECSS-T

LECS ☐

LEC ☐

25A-

11-LEJS

11-LEFS

LEY-X5

LEH

LER

LEPY
LEPS

LES
LESH

LEY
LEYG

LEM

LEL

LEJS
LEJB

LEFS
LEFB

Model Selection

Series LEYG ▶ Page 287



Moment Load Graph


Selection conditions

Mounting position	Vertical	Horizontal	
Max. speed [mm/s]	"Speed-Vertical Work Load Graph"	200 or less	Over 200
Graph (Sliding bearing type)	①, ②	⑤, ⑥*	⑦, ⑧
Graph (Ball bushing bearing type)	③, ④	⑨, ⑩	⑪, ⑫

* For the sliding bearing type, the speed is restricted with a horizontal/moment load.


Vertical Mounting, Sliding Bearing

① 70 mm stroke or less

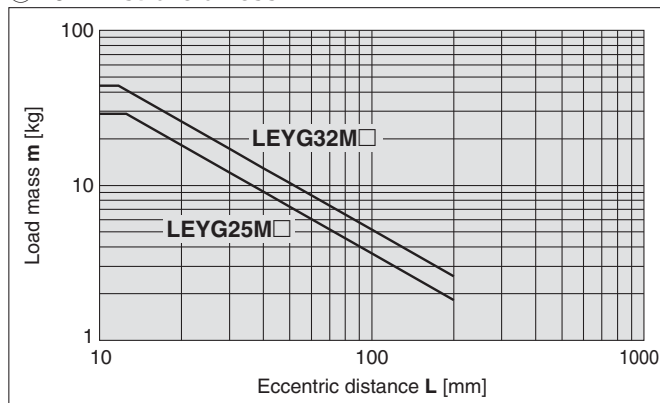


* The limit of vertical load mass varies depending on "lead" and "speed".
Check "Speed-Vertical Work Load Graph" on page 273.

② Over 75 mm stroke

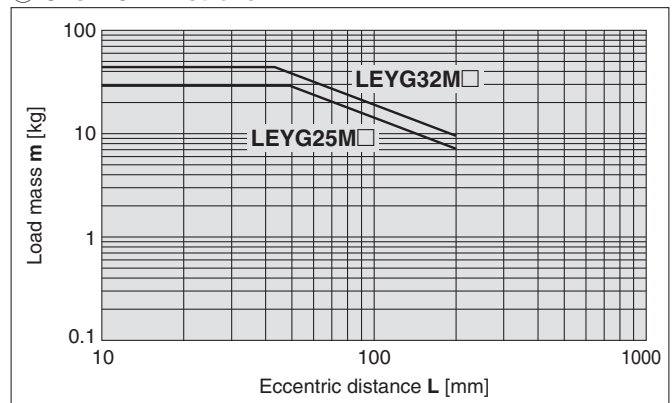


Vertical Mounting, Ball Bushing Bearing

③ 35 mm stroke or less

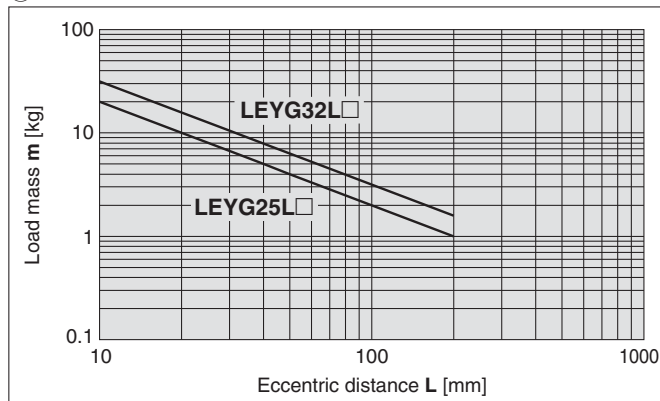

* The limit of vertical load mass varies depending on "lead" and "speed".
Check "Speed-Vertical Work Load Graph" on page 273.


④ Over 40 mm stroke

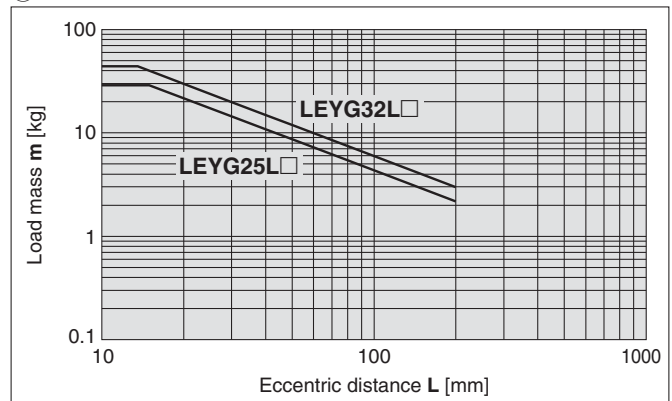


Moment Load Graph

Horizontal Mounting, Sliding Bearing


⑤ L = 50 mm Max. speed = 200 mm/s or less

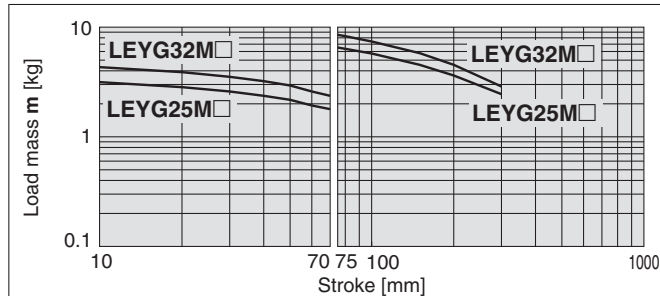


⑥ L = 100 mm Max. speed = 200 mm/s or less

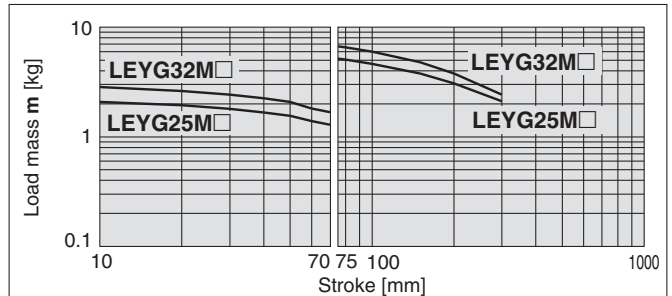

⑦ L = 50 mm Max. speed = Over 200 mm/s

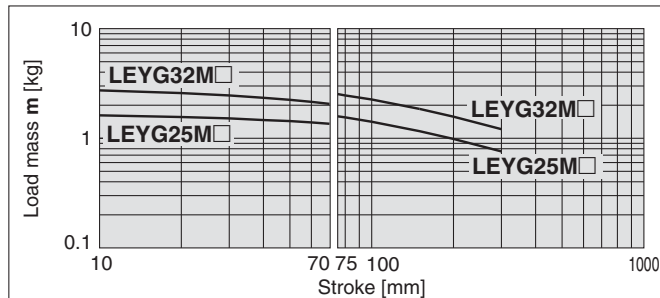


⑧ L = 100 mm Max. speed = Over 200 mm/s

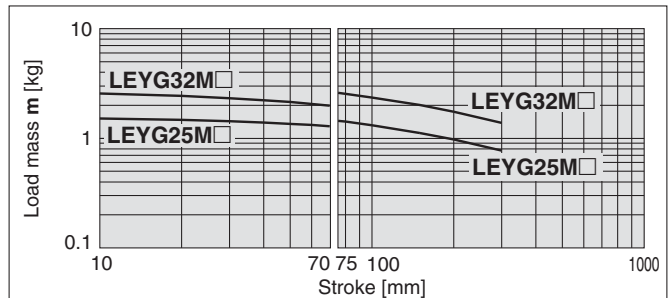


Horizontal Mounting, Ball Bushing Bearing


⑨ L = 50 mm Max. speed = 200 mm/s or less

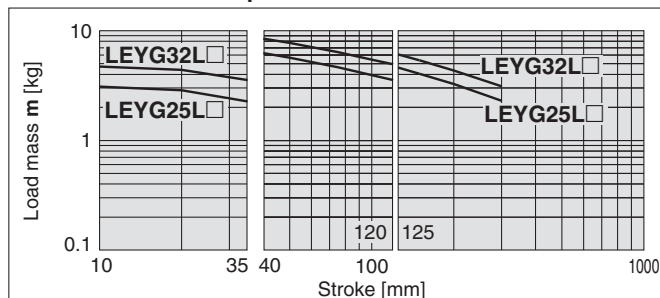


⑩ L = 100 mm Max. speed = 200 mm/s or less

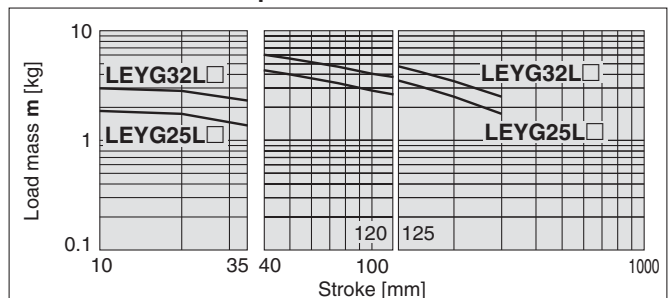

⑪ L = 50 mm Max. speed = Over 200 mm/s

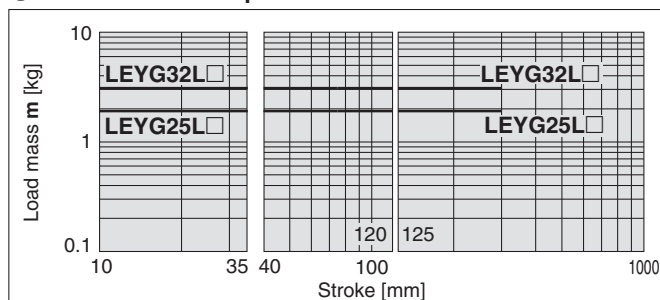


⑫ L = 100 mm Max. speed = Over 200 mm/s

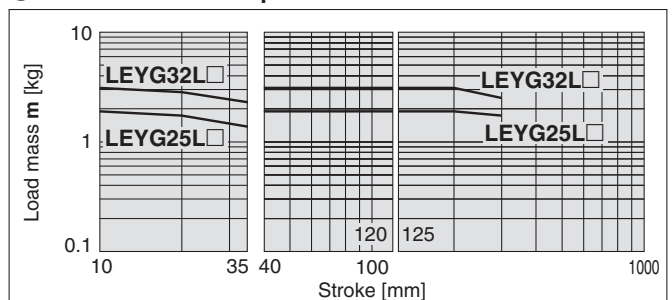

Operating Range when Used as Stopper



LEYG□M (Sliding bearing)



⚠ Caution


Handling Precautions

- Note 1) When used as a stopper, select a model with strokes 30 mm or less.
- Note 2) LEYG□L (ball bushing bearing) cannot be used as a stopper.
- Note 3) Workpiece collision in series with guide rod cannot be permitted (Fig. a).
- Note 4) The body should not be mounted on the end. It must be mounted on the top or bottom (Fig. b).

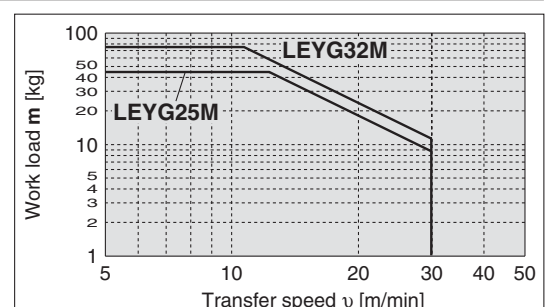

Speed-Vertical Work Load Graph/Required Conditions for “Regeneration Option”

LEYG25□ (Motor mounting position: Top mounting/In-line)

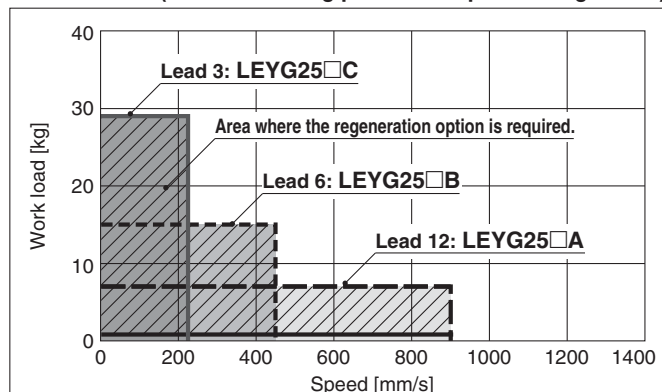


Required conditions for “Regeneration option”

* Regeneration option is required when using product above regeneration line in graph. (Order separately.)


“Regeneration Option” Models

Size	Model
LEYG25□	LEC-MR-RB-032
LEYG32□	LEC-MR-RB-032

LEYG32□ (Motor mounting position: Top mounting)

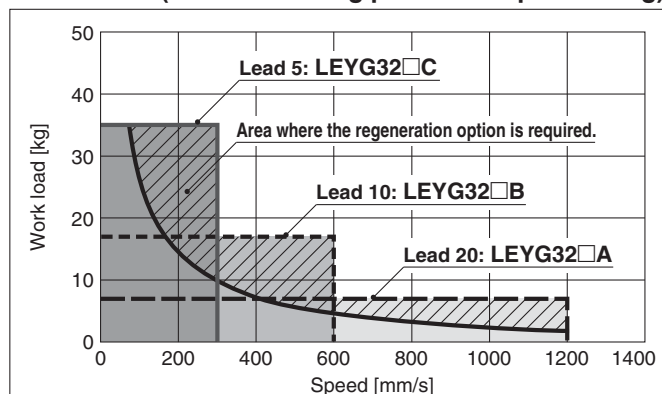


LEYG32D (Motor mounting position: In-line)

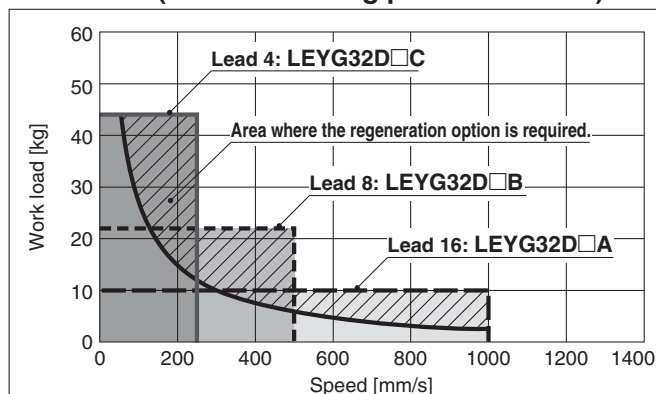

Speed-Horizontal Work Load Graph/Required Conditions for “Regeneration Option”

LEYG25□ (Motor mounting position: Top mounting/In-line)

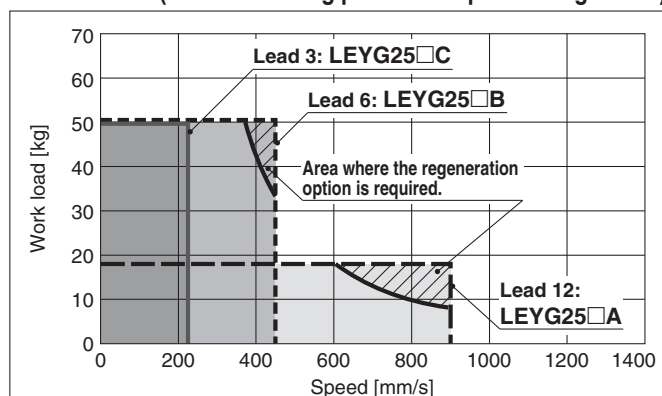


Required conditions for “Regeneration option”

* Regeneration option is required when using product above regeneration line in graph. (Order separately.)


“Regeneration Option” Models

Size	Model
LEYG25□	LEC-MR-RB-032
LEYG32□	LEC-MR-RB-032

LEYG32□ (Motor mounting position: Top mounting)

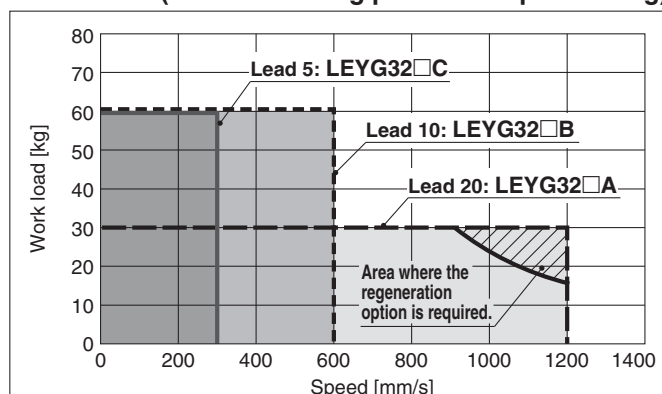


LEYG32D (Motor mounting position: In-line)

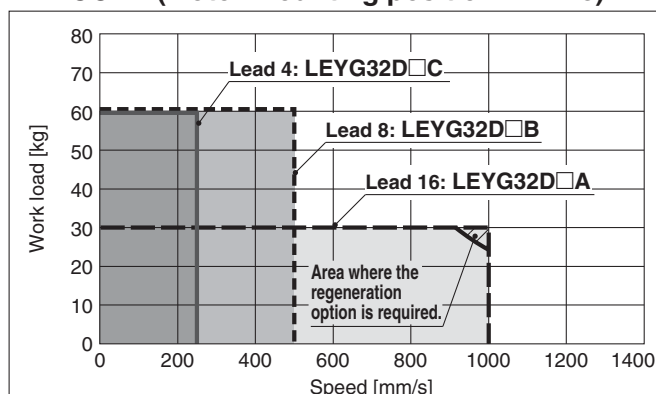


Force Conversion Graph

LEYG25□ (Motor mounting position: Top mounting/In-line)

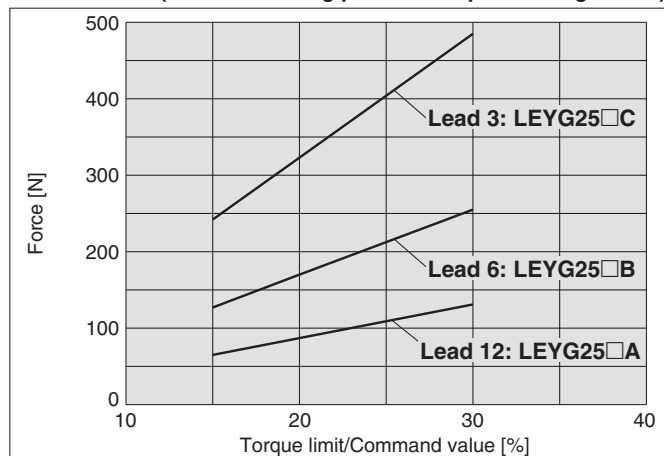


Torque limit/Command value [%]	Duty ratio [%]	Continuous pushing time [minute]
25 or less	100	—
30	60	1.5

LEYG32□ (Motor mounting position: Top mounting)

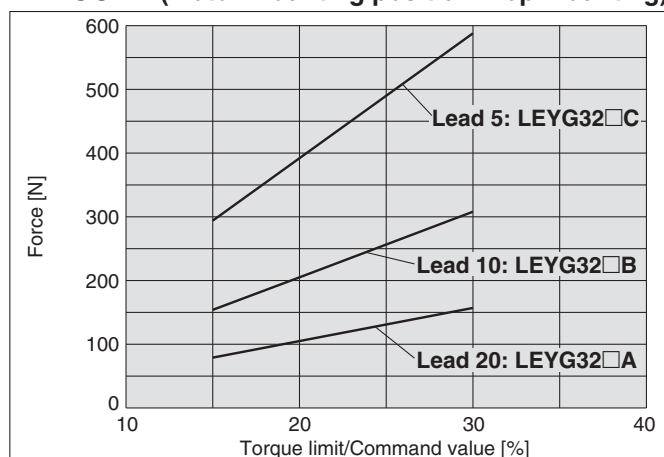

Torque limit/Command value [%]	Duty ratio [%]	Continuous pushing time [minute]
25 or less	100	—
30	60	1.5

LEYG32D (Motor mounting position: In-line)

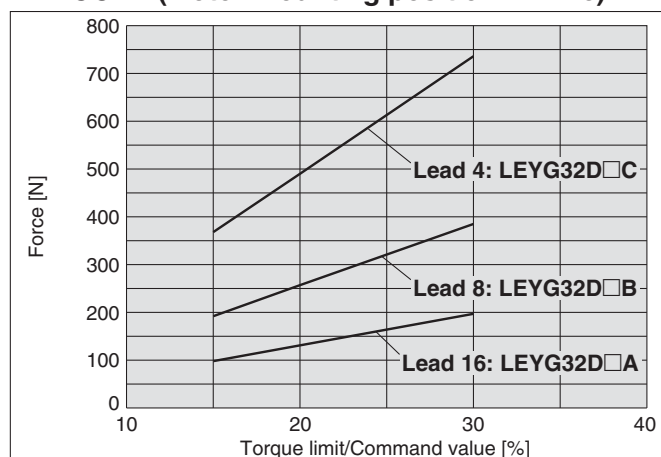

Torque limit/Command value [%]	Duty ratio [%]	Continuous pushing time [minute]
25 or less	100	—
30	60	1.5

LEFS
LEJB

LEJS
LEJB

LEL

LEM

LEY
LEYG

LES
LESH

LEPY
LEPS

LER

LEH

LEY-X5

11-LEFS

11-LEJS

25A-

LEC□

LECS□

LECS-T

LECYM
LECYU

Motorless

LAT3

Electric Actuator/ Guide Rod Type

Series **LEYG** LEYG16, 25, 32, 40



How to Order

LEYG **16** **M** **B** - **50** **S** **1** **6N** **1**

1 2 3 4 5 6 7 8 9 10 11 12 13

1 Size

16
25
32
40

2 Bearing type

M	Sliding bearing
L	Ball bushing bearing

* When [M: Sliding bearing] is selected, the maximum speed of lead [A] is 400 mm/s (at no-load, horizontal mounting). The speed is also restricted with a horizontal/moment load. Refer to "Model Selection" on page 263.

4 Motor type

Symbol	Type	Size			Compatible controller/driver
		LEYG16	LEYG25	LEYG32/40	
Nil	Step motor (Servo/24 VDC)	●	●	●	LECP6 LECP1 LECPA LECPMJ
A	Servo motor (24 VDC)	●	●	—	LECA6

3 Motor mounting position

Nil	Top mounting
D	In-line

5 Lead [mm]

Symbol	LEYG16	LEYG25	LEYG32/40
A	10	12	16
B	5	6	8
C	2.5	3	4

6 Stroke [mm]

30	30
to	to
300	300

* Refer to the applicable stroke table.

* There is a limit for mounting size 32/40 top mounting types and 50 mm stroke or less. Refer to the dimensions.

7 Motor option*

Nil	Without option
C	With motor cover
B	With lock
W	With lock/motor cover

* When "With lock" or "With lock/motor cover" are selected for the top mounting type, the motor body will stick out of the end of the body for size 16/40 with stroke 30 mm or less. Check for interference with workpieces before selecting a model.

8 Guide option

Nil	Without option
F	With grease retaining function

* Only available for size 25 and 32 sliding bearings. (Refer to "Construction" on page 280.)

Caution

[CE-compliant products]

- EMC compliance was tested by combining the electric actuator LEYG series and the controller LEC series. The EMC depends on the configuration of the customer's control panel and the relationship with other electrical equipment and wiring. Therefore, conformity to the EMC directive cannot be certified for SMC components incorporated into the customer's equipment under actual operating conditions. As a result, it is necessary for the customer to verify conformity to the EMC directive for the machinery and equipment as a whole.
- For the servo motor (24 VDC) specification, EMC compliance was tested by installing a noise filter set (LEC-NFA). Refer to page 559 for the noise filter set. Refer to the LECA Operation Manual for installation.
- CC-Link direct input type (LECPMJ) is not CE-compliant.

[UL-compliant products]

When conformity to UL is required, the electric actuator and controller/driver should be used with a UL1310 Class 2 power supply.

* Applicable stroke table

●: Standard

Model \ Stroke [mm]	30	50	100	150	200	250	300	Manufacturable stroke range [mm]
LEYG16	●	●	●	●	●	—	—	10 to 200
LEYG25	●	●	●	●	●	●	●	15 to 300
LEYG32/40	●	●	●	●	●	●	●	20 to 300

* Please consult with SMC for non-standard strokes as they are produced as special orders.


For auto switches, refer to pages 243 and 244.

The actuator and controller/driver are sold as a package.

Confirm that the combination of the controller/driver and the actuator is correct.

<Check the following before use.>


- Check the actuator label for model number. This matches the controller/driver.
- Check Parallel I/O configuration matches (NPN or PNP).

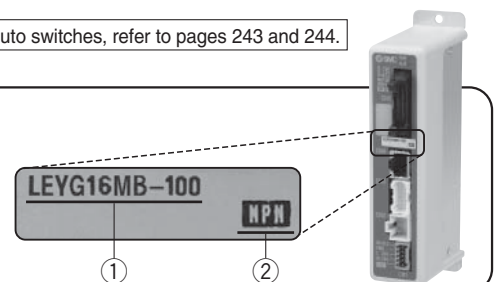


* Refer to the operation manual for using the products. Please download it via our website, <http://www.smcworld.com>

Electric Actuator/Guide Rod Type **Series LEYG**

Step Motor (Servo/24 VDC) Servo Motor (24 VDC)

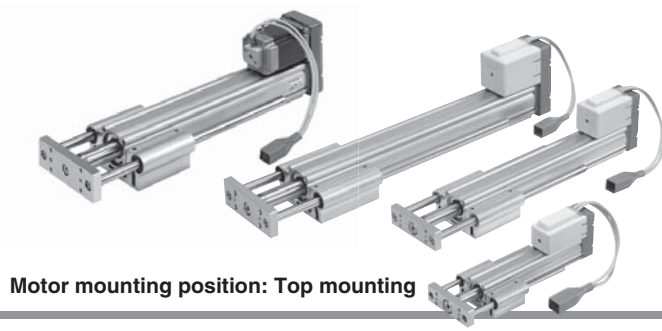

Motor mounting position: Top mounting

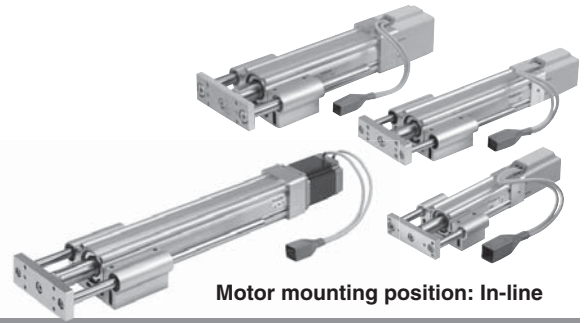

Motor mounting position: In-line

9 Actuator cable type*1

Nil	Without cable
S	Standard cable*2
R	Robotic cable (Flexible cable)

*1 The standard cable should be used on fixed parts. For using on moving parts, select the robotic cable.

*2 Only available for the motor type "Step motor".

10 Actuator cable length [m]

Nil	Without cable
1	1.5
3	3
5	5
8	8*
A	10*
B	15*
C	20*

* Produced upon receipt of order (Robotic cable only)
Refer to the specifications Note 5) on page 277.

11 Controller/Driver type*1

Nil	Without controller/driver	
6N	LECP6/LECA6 (Step data input type)	NPN
6P		PNP
1N	LECP1*2 (Programless type)	NPN
1P		PNP
MJ	LECPMJ*2 *3 (CC-Link direct input type)	—
AN	LECPA*2 *4 (Pulse input type)	NPN
AP		PNP

*1 For details about controller/driver and compatible motor, refer to the compatible controller/driver below.

*2 Only available for the motor type "Step motor".

*3 Not applicable to CE.

*4 When pulse signals are open collector, order the current limiting resistor (LEC-PA-R-□) on page 587 separately.

12 I/O cable length*1, Communication plug

Nil	Without cable (Without communication plug connector)*3
1	1.5 m
3	3 m*2
5	5 m*2
S	Straight type communication plug connector*3
T	T-branch type communication plug connector*3

*1 If "Without controller/driver" is selected for controller/driver types, I/O cable cannot be selected. Refer to page 559 (For LECP6/LECA6), page 573 (For LECP1) or page 587 (For LECPA) if I/O cable is required.

*2 When "Pulse input type" is selected for controller/driver types, pulse input usable only with differential. Only 1.5 m cables usable with open collector.

*3 For the LECPMJ, only "Nil", "S" and "T" are selectable since I/O cable is not included.

13 Controller/Driver mounting






Nil	Screw mounting
D	DIN rail mounting*

* DIN rail is not included. Order it separately.

Use of auto switches for the guide rod type LEYG series

- Insert the auto switch from the front side with rod (plate) sticking out.
- For the parts hidden behind the guide attachment (Rod stick out side), the auto switch cannot be fixed.
- Please consult with SMC when using auto switch on the rod stick out side, as it is produced as a special order.

Compatible Controller/Driver

Type	Step data input type	Step data input type	CC-Link direct input type	Programless type	Pulse input type
					
Series	LECP6	LECA6	LECPMJ	LECP1	LECPA
Features	Value (Step data) input Standard controller		CC-Link direct input	Capable of setting up operation (step data) without using a PC or teaching box	Operation by pulse signals
Compatible motor	Step motor (Servo/24 VDC)	Servo motor (24 VDC)	Step motor (Servo/24 VDC)		
Maximum number of step data	64 points			14 points	—
Power supply voltage	24 VDC				
Reference page	Page 551	Page 551	Page 591	Page 567	Page 581

Specifications

Step Motor (Servo/24 VDC)

Model			LEYG16 ^M			LEYG25 ^M			LEYG32 ^M			LEYG40 ^M			
Actuator specifications	Stroke [mm] ^{Note 1)}		30, 50, 100, 150, 200			30, 50, 100, 150, 200, 250, 300			30, 50, 100, 150, 200, 250, 300			30, 50, 100, 150, 200, 250, 300			
	Work load [kg] ^{Note 2)}	Horizontal (LECP6, LECPC1, LECPCMJ)	Acceleration/Deceleration at 3000 [mm/s ²]	6	17	30	20	40	60	30	45	60	50	60	80
			Acceleration/Deceleration at 2000 [mm/s ²]	10	23	35	30	55	70	40	60	80	60	70	90
		Horizontal (LECPA)	Acceleration/Deceleration at 3000 [mm/s ²]	4	11	20	12	30	30	20	40	40	30	60	60
			Acceleration/Deceleration at 2000 [mm/s ²]	6	17	30	18	50	50	30	60	60	—	—	—
		Vertical	Acceleration/Deceleration at 3000 [mm/s ²]	1.5	3.5	7.5	7	15	29	9	20	41	11	25	51
	Pushing force [N] ^{Note 3) 4) 5)}		14 to 38	27 to 74	51 to 141	63 to 122	126 to 238	232 to 452	80 to 189	156 to 370	296 to 707	132 to 283	266 to 553	562 to 1058	
	Speed [mm/s] ^{Note 5)}	LECP6/LECP1/LECPMJ	15 to 500	8 to 250	4 to 125	18 to 500	9 to 250	5 to 125	24 to 500	12 to 300	6 to 150	24 to 500	12 to 350	6 to 175	
		LECPA								12 to 250	6 to 125	24 to 300	12 to 150	6 to 75	
	Max. acceleration/deceleration [mm/s ²]		3000												
	Pushing speed [mm/s] ^{Note 6)}		50 or less			35 or less			30 or less			30 or less			
Positioning repeatability [mm]		±0.02													
Lost motion [mm] ^{Note 7)}		0.1 or less													
Screw lead [mm]		10	5	2.5	12	6	3	16	8	4	16	8	4		
Impact/Vibration resistance [m/s ²] ^{Note 8)}		50/20													
Actuation type		Ball screw + Belt (LEYG□□), Ball screw (LEYG□□D)													
Guide type		Sliding bearing (LEYG□M), Ball bushing bearing (LEYG□L)													
Operating temp. range [°C]		5 to 40													
Operating humidity range [%RH]		90 or less (No condensation)													
Electric specifications	Motor size		□28			□42			□56.4			□56.4			
	Motor type		Step motor (Servo/24 VDC)												
	Encoder		Incremental A/B phase (800 pulse/rotation)												
	Rated voltage [V]		24 VDC ±10%												
	Power consumption [W] ^{Note 9)}		23			40			50			50			
	Standby power consumption when operating [W] ^{Note 10)}		16			15			48			48			
Lock unit specifications	Max. instantaneous power consumption [W] ^{Note 11)}		43			48			104			106			
	Type ^{Note 12)}		Non-magnetizing lock												
	Holding force [N]		20	39	78	78	157	294	108	216	421	127	265	519	
	Power consumption [W] ^{Note 13)}		2.9			5			5			5			
	Rated voltage [V]		24 VDC ±10%												

Note 1) Please consult with SMC for non-standard strokes as they are produced as special orders.

Note 2) Horizontal: An external guide is necessary to support the load (Friction coefficient of guide: 0.1 or less). The actual work load and transfer speed change according to the condition of the external guide. Also, speed changes according to the work load. Check "Model Selection" on pages 265 and 266.

Vertical: Speed changes according to the work load. Check "Model Selection" on pages 265 and 266.

Set the acceleration/deceleration values to be 3000 [mm/s²] or less.

Note 3) Pushing force accuracy is ±20% (F.S.).

Note 4) The pushing force values for LEYG16□□□ is 35% to 85%, for LEYG25□□□ is 35% to 65%, for LEYG32□□□ is 35% to 85% and for LEYG40□□□ is 35% to 65%. The pushing force values change according to the duty ratio and pushing speed. Check "Model Selection" on page 268.

Note 5) The speed and force may change depending on the cable length, load and mounting conditions. Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10% for each 5 m. (At 15 m: Reduced by up to 20%)

When [M: Sliding bearing] is selected, the maximum speed of lead [A] is 400 mm/s (at no-load, horizontal mounting).

The speed is also restricted with a horizontal/moment load. Refer to "Model Selection" on page 263.

Note 6) The allowable speed for the pushing operation.

Note 7) A reference value for correcting an error in reciprocal operation.

Note 8) Impact resistance: No malfunction occurred when it was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. Test was performed in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Note 9) The power consumption (including the controller) is for when the actuator is operating.

Note 10) The standby power consumption when operating (including the controller) is for when the actuator is stopped in the set position during the operation. Except during the pushing operation.

Note 11) The maximum instantaneous power consumption (including the controller) is for when the actuator is operating. This value can be used for the selection of the power supply.

Note 12) With lock only

Note 13) For an actuator with lock, add the power consumption for the lock.

Specifications

Servo Motor (24 VDC)

Model			LEYG16 ^M A			LEYG25 ^M A				
Actuator specifications	Stroke [mm] ^{Note 1)}		30, 50, 100, 150, 200			30, 50, 100, 150, 200, 250, 300				
	Work load [kg] ^{Note 2)}	Horizontal	Acceleration/Deceleration at 3000 [mm/s ²]		3	6	12	7	15	30
		Vertical	Acceleration/Deceleration at 3000 [mm/s ²]		1.5	3.5	7.5	2	5	11
	Pushing force [N] ^{Note 3) 4)}		16 to 30	30 to 58	57 to 111	18 to 35	37 to 72	66 to 130		
	Speed [mm/s]		1 to 500	1 to 250	1 to 125	2 to 500	1 to 250	1 to 125		
	Max. acceleration/deceleration [mm/s ²]		3000							
	Pushing speed [mm/s] ^{Note 5)}		50 or less				35 or less			
	Positioning repeatability [mm]		±0.02							
	Lost motion [mm] ^{Note 6)}		0.1 or less							
	Screw lead [mm]		10	5	2.5	12	6	3		
	Impact/Vibration resistance [m/s ²] ^{Note 7)}		50/20							
	Actuation type		Ball screw + Belt (LEYG□□□), Ball screw (LEYG□□□D)							
Guide type		Sliding bearing (LEYG□□M), Ball bushing bearing (LEYG□□L)								
Operating temp. range [°C]		5 to 40								
Operating humidity range [%RH]		90 or less (No condensation)								
Electric specifications	Motor size		□28			□42				
	Motor output [W]		30			36				
	Motor type		Servo motor (24 VDC)							
	Encoder		Incremental A/B (800 pulse/rotation)/Z phase							
	Rated voltage [V]		24 VDC ±10%							
	Power consumption [W] ^{Note 8)}		40			86				
	Standby power consumption when operating [W] ^{Note 8)}		4 (Horizontal)/6 (Vertical)			4 (Horizontal)/12 (Vertical)				
	Max. instantaneous power consumption [W] ^{Note 10)}		59			96				
Lock unit specifications	Type ^{Note 11)}		Non-magnetizing lock							
	Holding force [N]		20	39	78	78	157	294		
	Power consumption [W] ^{Note 12)}		2.9			5				
	Rated voltage [V]		24 VDC ±10%							

Note 1) Please consult with SMC for non-standard strokes as they are produced as special orders.

Note 2) Horizontal: An external guide is necessary to support the load (Friction coefficient of guide: 0.1 or less). The actual work load and transfer speed change according to the condition of the external guide.

Vertical: Check "Model Selection" on page 267 for details. Set the acceleration/deceleration values to be 3000 [mm/s²] or less.

Note 3) Pushing force accuracy is ±20% (F.S.).

Note 4) The pushing force values for LEYG16□□□ is 50% to 95% and for LEYG25□□□ is 50% to 95%. The pushing force values change according to the duty ratio and pushing speed. Check "Model Selection" on page 268.

Note 5) The allowable speed for the pushing operation.

Note 6) A reference value for correcting an error in reciprocal operation.

Note 7) Impact resistance: No malfunction occurred when it was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. Test was performed in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Note 8) The power consumption (including the controller) is for when the actuator is operating.

Note 9) The standby power consumption when operating (including the controller) is for when the actuator is stopped in the set position during the operation. Except during the pushing operation.

Note 10) The maximum instantaneous power consumption (including the controller) is for when the actuator is operating. This value can be used for the selection of the power supply.

Note 11) With lock only

Note 12) For an actuator with lock, add the power consumption for the lock.

Weight

Weight: Motor Top Mounting Type

Model		LEYG16M					LEYG25M							LEYG32M						
Stroke [mm]		30	50	100	150	200	30	50	100	150	200	250	300	30	50	100	150	200	250	300
Product weight [kg]	Step motor	0.83	0.97	1.20	1.49	1.66	1.67	1.86	2.18	2.60	2.94	3.28	3.54	2.91	3.17	3.72	4.28	4.95	5.44	5.88
	Servo motor	0.83	0.97	1.20	1.49	1.66	1.63	1.82	2.14	2.56	2.90	3.24	3.50	—	—	—	—	—	—	—

Model		LEYG16L					LEYG25L							LEYG32L						
Stroke [mm]		30	50	100	150	200	30	50	100	150	200	250	300	30	50	100	150	200	250	300
Product weight [kg]	Step motor	0.84	0.97	1.14	1.43	1.58	1.68	1.89	2.13	2.56	2.82	3.14	3.38	2.91	3.18	3.57	4.12	4.66	5.17	5.56
	Servo motor	0.84	0.97	1.14	1.43	1.58	1.64	1.85	2.09	2.52	2.78	3.10	3.34	—	—	—	—	—	—	—

Model		LEYG40M							LEYG40L						
Stroke [mm]		30	50	100	150	200	250	300	30	50	100	150	200	250	300
Product weight [kg]	Step motor	3.21	3.47	4.02	4.58	5.25	5.74	6.18	3.21	3.48	3.87	4.42	4.96	5.47	5.86
	Servo motor	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Weight: In-line Motor Type

Model			LEYG16M					LEYG25M							LEYG32M						
Stroke [mm]			30	50	100	150	200	30	50	100	150	200	250	300	30	50	100	150	200	250	300
Product weight [kg]	Step motor		0.83	0.97	1.20	1.49	1.66	1.66	1.85	2.17	2.59	2.93	3.27	3.53	2.90	3.16	3.71	4.27	4.94	5.43	5.87
	Servo motor		0.83	0.97	1.20	1.49	1.66	1.62	1.81	2.13	2.55	2.89	3.23	3.49	—	—	—	—	—	—	—

Model			LEYG16L					LEYG25L							LEYG32L						
Stroke [mm]			30	50	100	150	200	30	50	100	150	200	250	300	30	50	100	150	200	250	300
Product weight [kg]	Step motor		0.84	0.97	1.14	1.43	1.58	1.67	1.88	2.12	2.55	2.81	3.13	3.37	2.90	3.17	3.56	4.11	4.65	5.16	5.55
	Servo motor		0.84	0.97	1.14	1.43	1.58	1.63	1.84	2.08	2.51	2.77	3.09	3.33	—	—	—	—	—	—	—

Model			LEYG40M							LEYG40L						
Stroke [mm]			30	50	100	150	200	250	300	30	50	100	150	200	250	300
Product weight [kg]	Step motor		3.20	3.46	4.01	4.57	5.24	5.73	6.17	3.20	3.47	3.86	4.41	4.95	5.46	5.85
	Servo motor		—	—	—	—	—	—	—	—	—	—	—	—	—	—


Additional Weight

[kg]


Size	16	25	32	40
Lock	0.12	0.26	0.53	0.53
Motor cover	0.02	0.03	0.04	0.05
Lock/Motor cover	0.16	0.32	0.61	0.62

Construction


Motor top mounting type

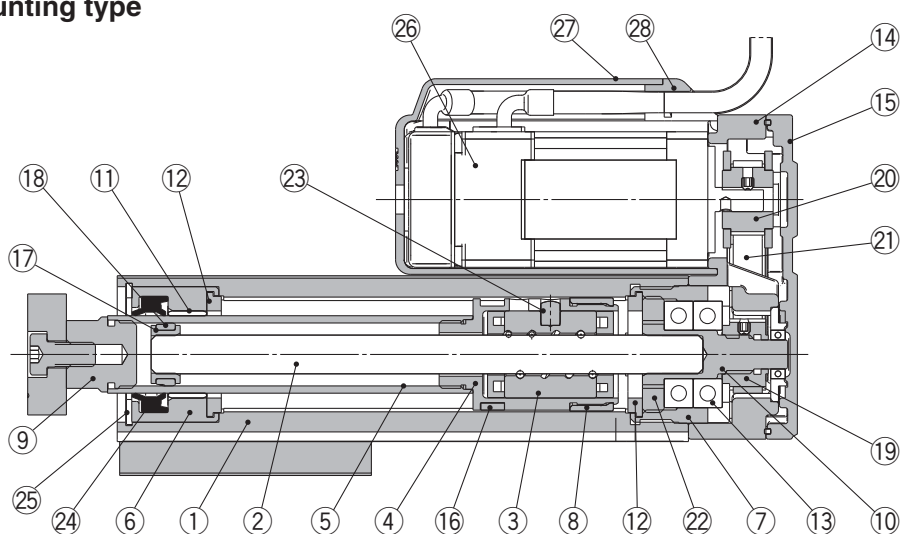


Motor top mounting type With lock/motor cover

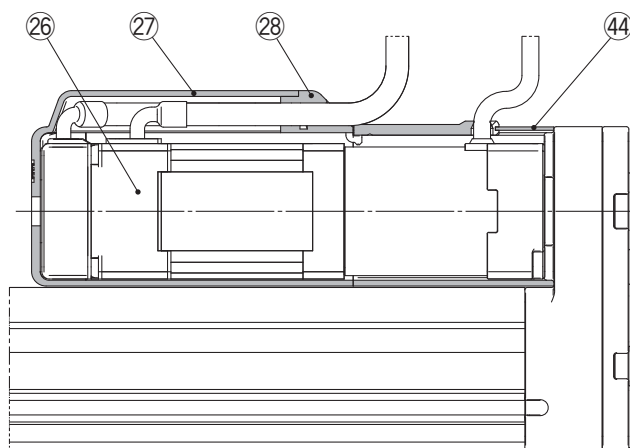

In-line motor type

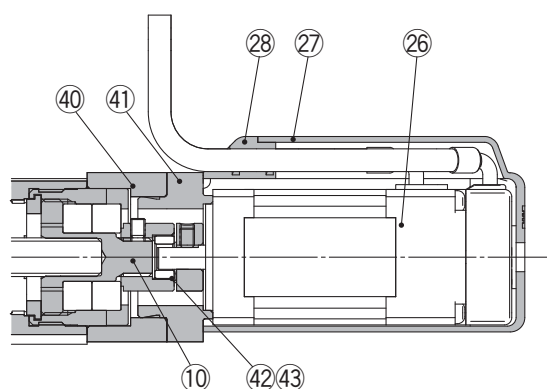


In-line motor type With lock/motor cover

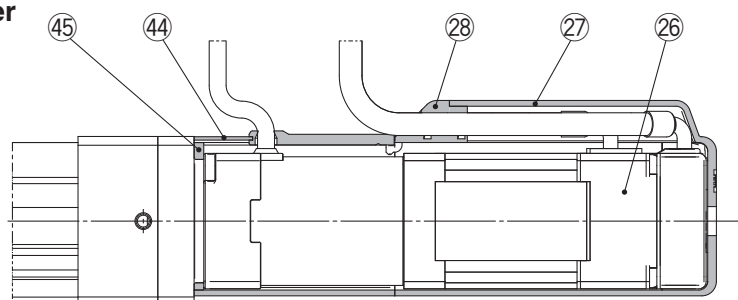

Construction

LEYG□M

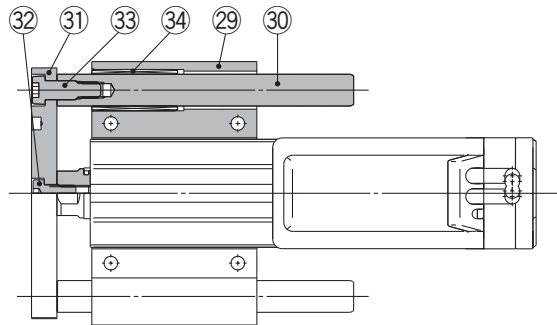

LEYG¹⁶₂₅₃₂₄₀M: 50st or less




LEYG¹⁶₂₅₃₂₄₀M: Over 50st



When grease retaining function selected

LEYG²⁵₃₂₄₀M□□^A_B-□□F: 50st or less

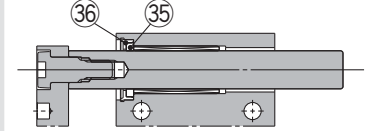


LEYG²⁵₃₂₄₀M□□^A_B-□□F: Over 50st




Note) Felt material is inserted to retain grease at the sliding part of the sliding bearing. This lengthens the life of the sliding part, but does not guarantee it permanently.

LEYG□L

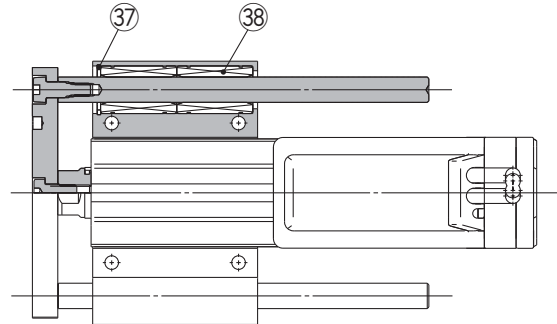


LEYG16L: 30st or less


LEYG²⁵₃₂₄₀L: 100st or less



LEYG16L: Over 30st, 100st or less



LEYG¹⁶₂₅₃₂₄₀L: Over 100st



Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Ball screw (shaft)	Alloy steel	
3	Ball screw nut	Resin/Alloy steel	
4	Piston	Aluminum alloy	
5	Piston rod	Stainless steel	Hard chrome plating
6	Rod cover	Aluminum alloy	
7	Housing	Aluminum alloy	
8	Rotation stopper	POM	
9	Socket	Free cutting carbon steel	Nickel plating
10	Connected shaft	Free cutting carbon steel	Nickel plating
11	Bushing	Lead bronze cast	
12	Bumper	Urethane	
13	Bearing	—	
14	Return box	Aluminum die-cast	Coating
15	Return plate	Aluminum die-cast	Coating
16	Magnet	—	
17	Wear ring holder	Stainless steel	Stroke 101 mm or more
18	Wear ring	POM	Stroke 101 mm or more
19	Screw shaft pulley	Aluminum alloy	
20	Motor pulley	Aluminum alloy	
21	Belt	—	
22	Bearing stopper	Aluminum alloy	
23	Parallel pin	Stainless steel	
24	Seal	NBR	
25	Retaining ring	Steel for spring	Phosphate coated
26	Motor	—	
27	Motor cover	Synthetic resin	Only "With motor cover"
28	Grommet	Synthetic resin	Only "With motor cover"

No.	Description	Material	Note
29	Guide attachment	Aluminum alloy	Anodized
30	Guide rod	Carbon steel	
31	Plate	Aluminum alloy	Anodized
32	Plate mounting cap screw	Carbon steel	Nickel plating
33	Guide cap screw	Carbon steel	Nickel plating
34	Sliding bearing	—	
35	Lube-retainer	Felt	
36	Holder	Resin	
37	Retaining ring	Steel for spring	Phosphate coated
38	Ball bushing	—	
39	Spacer	Aluminum alloy	Chromated
40	Motor block	Aluminum alloy	Anodized
41	Motor adapter	Aluminum alloy	Anodized/LEY16, 25 only
42	Hub	Aluminum alloy	
43	Spider	NBR	
44	Motor cover with lock	Aluminum alloy	Only "With lock/motor cover"
45	Cover support	Aluminum alloy	Only "With lock/motor cover"

Replacement Parts/Belt

No.	Size	Order no.
21	16	LE-D-2-1
	25	LE-D-2-2
	32, 40	LE-D-2-3

Replacement Parts/Grease Pack

Applied portion	Order no.
Piston rod	GR-S-010 (10 g)
Guide rod	GR-S-020 (20 g)

* Apply grease on the piston rod periodically.

Grease should be applied at 1 million cycles or 200 km, whichever comes first.

Step Motor (Servo/24 VDC) **Servo Motor (24 VDC)**

Dimensions: Motor Top Mounting


Note 1) Range within which the rod can move when it returns to origin.

Make sure a workpiece mounted on the rod does not interfere with the workpieces and facilities around the rod.

Note 2) Position after return to origin.

Note 3) [] for when the direction of return to origin has changed.


Note 4) Through holes cannot be used for size 32/40 with 50 mm stroke or less.

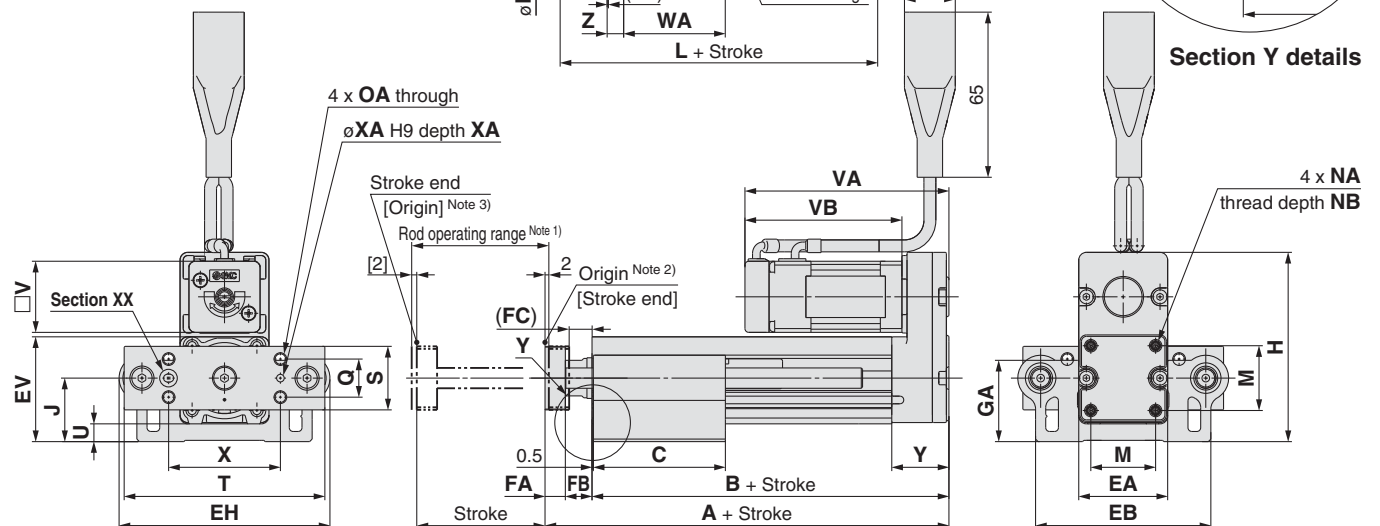

LEYG□L (Ball bushing bearing)

Standard stroke: 50, 100, 200

Size	Stroke range	L	DB
16	90st or less	75	8
	91st or more, 200st or less	105	
25	114st or less	91	10
	115st or more, 190st or less	115	
	191st or more, 300st or less	133	
32	114st or less	97.5	13
40	115st or more, 190st or less	116.5	
	191st or more, 300st or less	134	

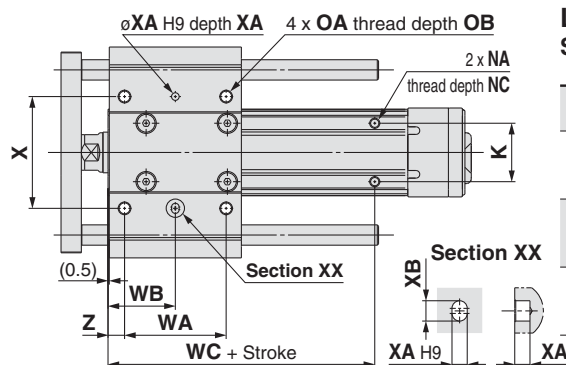

LEYG□M (Sliding bearing)

Standard stroke: 30, 50, 100

Size	Stroke range	L	DB
16	64st or less	51.5	10
	65st or more, 90st or less	74.5	
	91st or more, 200st or less	105	
25	59st or less	67.5	12
	60st or more, 185st or less	100.5	
	186st or more, 300st or less	138	
32 40	54st or less	74	16
	55st or more, 180st or less	107	
	181st or more, 300st or less	144	

LEYG□M, LEYG□L Common

Size	Stroke range	A	B	C	DA	EA	EB	EH	EV	FA	FB	FC	G	GA	H	J	K	M	NA	NB	NC
16	39st or less	109	90.5	37	16	35	69	83	41.1	8	10.5	8.5	4.3	31.8	74.3	24.8	23	25.5	M4 x 0.7	7	5.5
	40st or more, 100st or less			52																	
	101st or more, 200st or less			82																	
25	39st or less	141.5	116	50	20	46	85	103	52.3	11	14.5	12.5	5.4	40.3	98.8	30.8	29	34	M5 x 0.8	8	6.5
	40st or more, 100st or less			67.5																	
	101st or more, 124st or less	166.5	141	84.5																	
	125st or more, 200st or less			102																	
	201st or more, 300st or less																				
32 40	39st or less	160.5	130	55	25	60	101	123	63.8	12	18.5	16.5	5.4	50.3	125.3	38.3	30	40	M6 x 1.0	10	8.5
	40st or more, 100st or less			68																	
	101st or more, 124st or less	190.5	160	85																	
	125st or more, 200st or less			102																	
	201st or more, 300st or less																				

Size	Stroke range	OA	OB	P	Q	S	T	U	V	Step motor		Servo motor		WA	WB	WC	X	XA	XB	Y	Z
										VA	VB	VA	VB								
16	39st or less	M5 x 0.8	10	65	15	25	79	6.8	28	80.3	61.8	81	62.5	25	19	55	44	3	4	22.5	6.5
	40st or more, 100st or less													40	26.5						
	101st or more, 200st or less													70	41.5	75					
25	39st or less	M6 x 1.0	12	80	18	30	95	6.8	42	85.4	63.4	81.6	59.6	35	26	70	54	4	5	26.5	8.5
	40st or more, 100st or less													50	33.5						
	101st or more, 124st or less													70	43.5	95					
	125st or more, 200st or less													85	51						
	201st or more, 300st or less													40	28.5						
32	39st or less	M6 x 1.0	12	95	28	40	117	7.3	56.4	95.4	68.4	—	—	50	33.5	75	64	5	6	34	8.5
	40st or more, 100st or less													70	43.5						
	101st or more, 124st or less													85	51	105					
	125st or more, 200st or less													40	28.5						
	201st or more, 300st or less													50	33.5						
40	39st or less	M6 x 1.0	12	95	28	40	117	7.3	56.4	117.4	90.4	—	—	40	28.5	75	64	5	6	34	8.5
	40st or more, 100st or less													50	33.5						
	101st or more, 124st or less													70	43.5	105					
	125st or more, 200st or less													85	51						
	201st or more, 300st or less													40	28.5						


Dimensions: In-line Motor

Note 1) Range within which the rod can move when it returns to origin.

Make sure a workpiece mounted on the rod does not interfere with the workpieces and facilities around the rod.


Note 2) Position after return to origin.

Note 3) [] for when the direction of return to origin has changed.

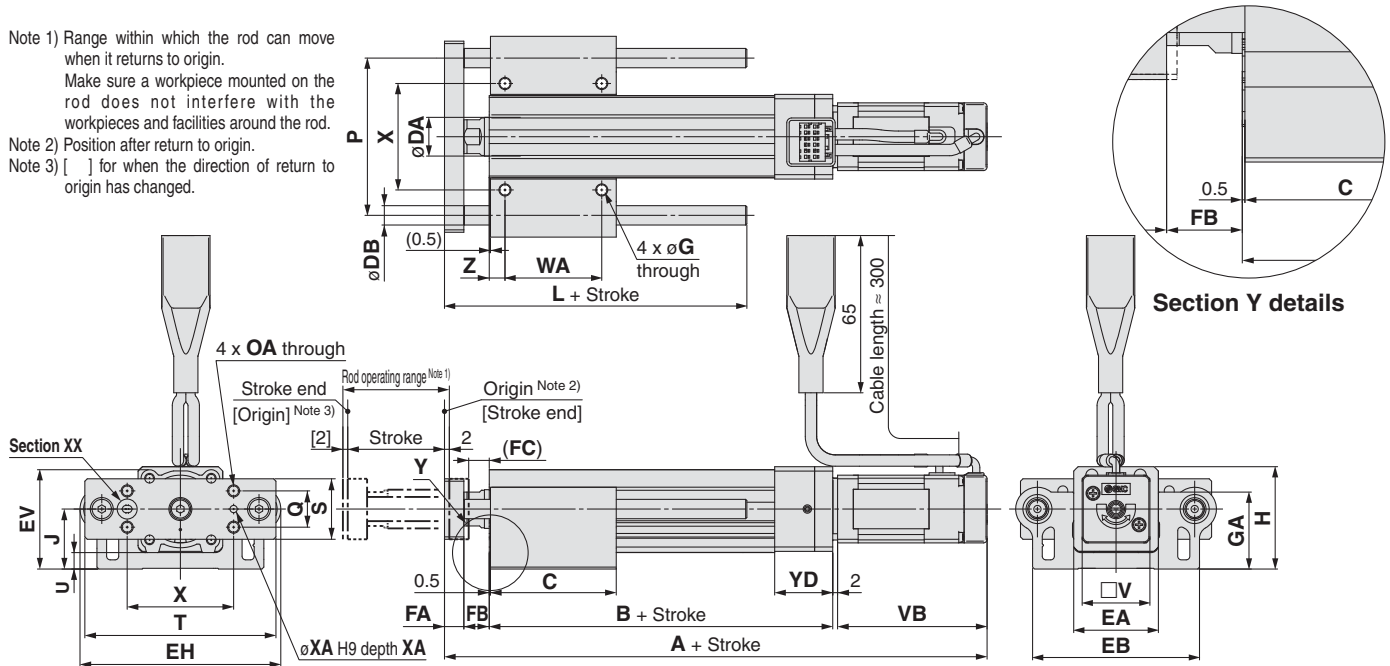

LEYG□L (Ball bushing bearing) Standard stroke: 50, 100, 200

Size	Stroke range	L	DB
16	90st or less	75	8
	91st or more, 200st or less	105	
25	114st or less	91	10
	115st or more, 190st or less	115	
32	114st or less	97.5	13
	115st or more, 190st or less	116.5	
40	114st or less	97.5	13
	115st or more, 190st or less	116.5	

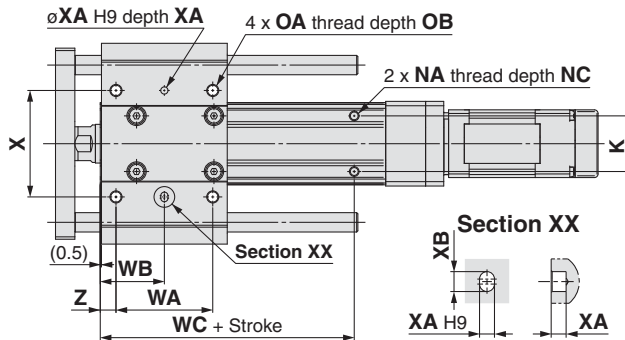

LEYG□M (Sliding bearing) Standard stroke: 30, 50, 100

Size	Stroke range	L	DB
16	64st or less	51.5	10
	65st or more, 90st or less	74.5	
25	59st or less	67.5	12
	60st or more, 185st or less	100.5	
32	54st or less	74	16
	55st or more, 180st or less	107	
40	54st or less	74	16
	55st or more, 180st or less	107	

LEYG□M, LEYG□L Common

Size	Stroke range	Step motor	Servo motor	A	B	C	DA	EA	EB	EH	EV	FA	FB	FC	G	GA	H	J	K	NA	NC
16	39st or less	174.3	175	92	37	52	16	35	69	83	41.1	8	10.5	8.5	4.3	31.8	42.3	24.8	23	M4 x 0.7	5.5
	40st or more, 100st or less	194.3	195	112	82	102	20	45	85	103	52.3	11	14.5	12.5	5.4	40.3	53.3	30.8	29	M5 x 0.8	6.5
	101st or more, 200st or less	206.4	202.6	115.5	67.5	102	20	45	85	103	52.3	11	14.5	12.5	5.4	40.3	53.3	30.8	29	M5 x 0.8	6.5
25	39st or less	206.4	202.6	115.5	67.5	102	20	45	85	103	52.3	11	14.5	12.5	5.4	40.3	53.3	30.8	29	M5 x 0.8	6.5
	40st or more, 100st or less	231.4	227.6	140.5	84.5	102	20	45	85	103	52.3	11	14.5	12.5	5.4	40.3	53.3	30.8	29	M5 x 0.8	6.5
	101st or more, 124st or less	231.4	227.6	140.5	84.5	102	20	45	85	103	52.3	11	14.5	12.5	5.4	40.3	53.3	30.8	29	M5 x 0.8	6.5
32	39st or less	228.9	—	128	55	102	25	60	101	123	63.8	12	18.5	16.5	5.4	50.3	68.3	38.3	30	M6 x 1.0	8.5
	40st or more, 100st or less	258.9	—	158	85	102	25	60	101	123	63.8	12	18.5	16.5	5.4	50.3	68.3	38.3	30	M6 x 1.0	8.5
	101st or more, 124st or less	258.9	—	158	85	102	25	60	101	123	63.8	12	18.5	16.5	5.4	50.3	68.3	38.3	30	M6 x 1.0	8.5
40	39st or less	250.9	—	128	55	102	25	60	101	123	63.8	12	18.5	16.5	5.4	50.3	68.3	38.3	30	M6 x 1.0	8.5
	40st or more, 100st or less	280.9	—	158	85	102	25	60	101	123	63.8	12	18.5	16.5	5.4	50.3	68.3	38.3	30	M6 x 1.0	8.5
	101st or more, 124st or less	280.9	—	158	85	102	25	60	101	123	63.8	12	18.5	16.5	5.4	50.3	68.3	38.3	30	M6 x 1.0	8.5
16	39st or less	M5 x 0.8	10	65	15	25	79	6.8	28	61.8	62.5	25	19	55	44	3	4	24	6.5		
	40st or more, 100st or less	M5 x 0.8	10	65	15	25	79	6.8	28	61.8	62.5	25	19	55	44	3	4	24	6.5		
	101st or more, 200st or less	M5 x 0.8	10	65	15	25	79	6.8	28	61.8	62.5	25	19	55	44	3	4	24	6.5		
25	39st or less	M6 x 1.0	12	80	18	30	95	6.8	42	63.4	59.6	50	33.5	75	54	4	5	26	8.5		
	40st or more, 100st or less	M6 x 1.0	12	80	18	30	95	6.8	42	63.4	59.6	50	33.5	75	54	4	5	26	8.5		
	101st or more, 124st or less	M6 x 1.0	12	80	18	30	95	6.8	42	63.4	59.6	50	33.5	75	54	4	5	26	8.5		
32	39st or less	M6 x 1.0	12	95	28	40	117	7.3	56.4	68.4	—	40	28.5	75	64	5	6	32	8.5		
	40st or more, 100st or less	M6 x 1.0	12	95	28	40	117	7.3	56.4	68.4	—	40	28.5	75	64	5	6	32	8.5		
	101st or more, 124st or less	M6 x 1.0	12	95	28	40	117	7.3	56.4	68.4	—	40	28.5	75	64	5	6	32	8.5		
40	39st or less	M6 x 1.0	12	95	28	40	117	7.3	56.4	90.4	—	40	28.5	75	64	5	6	32	8.5		
	40st or more, 100st or less	M6 x 1.0	12	95	28	40	117	7.3	56.4	90.4	—	40	28.5	75	64	5	6	32	8.5		
	101st or more, 124st or less	M6 x 1.0	12	95	28	40	117	7.3	56.4	90.4	—	40	28.5	75	64	5	6	32	8.5		

Series LEYG


Step Motor (Servo/24 VDC)

Servo Motor (24 VDC)

Dimensions


Motor top mounting type

With motor cover: LEYG $\begin{matrix} 16 \\ 25 \\ 32 \\ 40 \end{matrix} \square \square \square \begin{matrix} A \\ B \\ C \end{matrix}$




Size	T ₂	X ₂
16	7.5	83
25	7.5	88.5
32	7.5	98.5
40	7.5	120.5


Motor cover material:
Synthetic resin

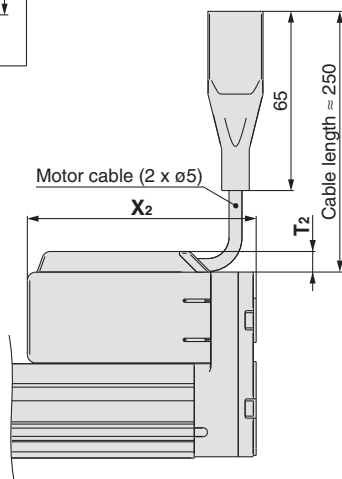

With lock: LEYG $\begin{matrix} 16 \\ 25 \\ 32 \\ 40 \end{matrix} \square \square \square \begin{matrix} A \\ B \\ C \end{matrix}$

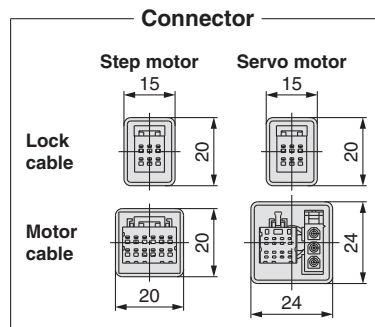


[mm]				
Size	Step motor		Servo motor	
	W	X	W	X
16	103.3	121.8	104.0	122.5
25	103.9	125.9	100.1	122.1
32	111.4	138.4	—	—
40	133.4	160.4	—	—


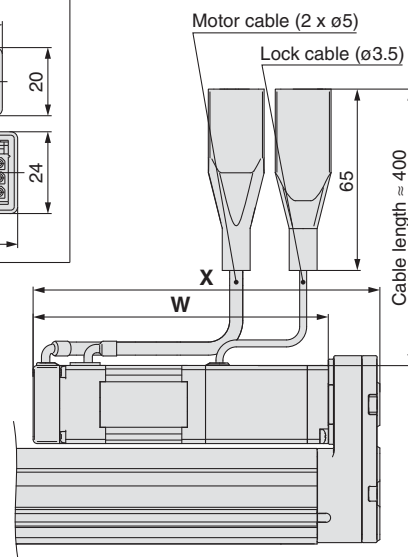


In-line motor type

With motor cover: LEYG $\begin{matrix} 16 \\ 25 \\ 32 \\ 40 \end{matrix} \square \square \square \begin{matrix} A \\ B \\ C \end{matrix}$

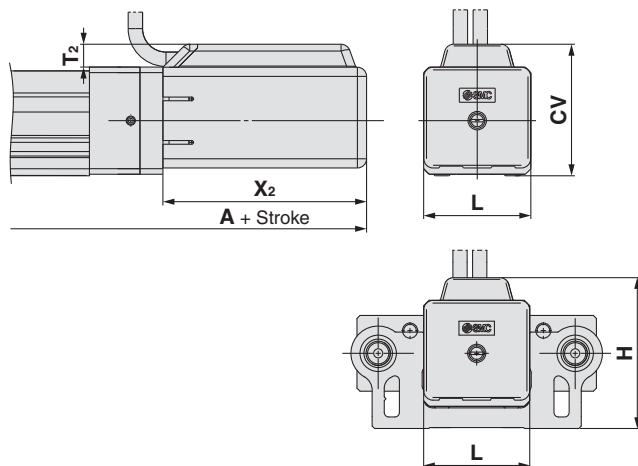

With lock: LEYG $\begin{matrix} 16 \\ 25 \\ 32 \\ 40 \end{matrix} \square \square \square \begin{matrix} A \\ B \\ C \end{matrix}$

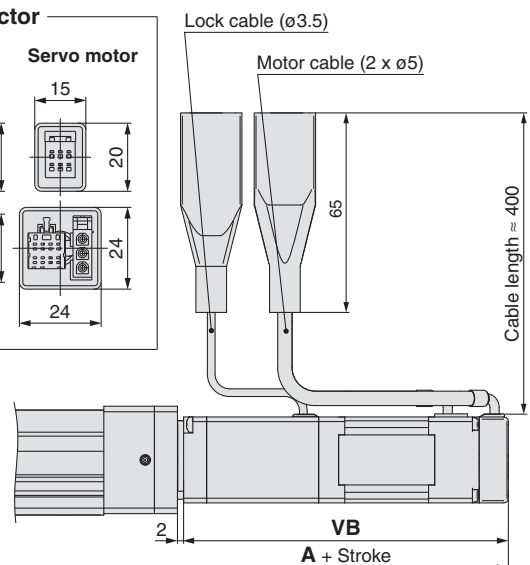


Size	Stroke range	A	T ₂	X ₂	L	H	CV
16	100st or less	177	7.5	66.5	35	49.8	43
	101st or more, 200st or less	197					
25	100st or less	209.5	7.5	68.5	46	61.3	54.5
	101st or more, 300st or less	234.5					
32	100st or less	232	7.5	73.5	60	75.8	68.5
	101st or more, 300st or less	262					
40	100st or less	254	7.5	95.5	60	75.8	68.5
	101st or more, 300st or less	284					

Size	Stroke range	Step motor	Servo motor	Step motor	Servo motor
		A		VB	
16	100st or less	215.8	216.5	103.3	104
	101st or more, 200st or less	235.8	236.5		
25	100st or less	246.9	243.1	103.9	100.1
	101st or more, 300st or less	271.9	268.1		
32	100st or less	271.9	—	111.4	—
	101st or more, 300st or less	301.9	—		
40	100st or less	293.9	—	133.4	—
	101st or more, 300st or less	323.9	—		

Dimensions


Motor top mounting type
 With lock/motor cover: LEYG $\begin{matrix} 16 \\ 25 \\ 32 \\ 40 \end{matrix} \square \square \begin{matrix} A \\ B \\ C \end{matrix} \square W$

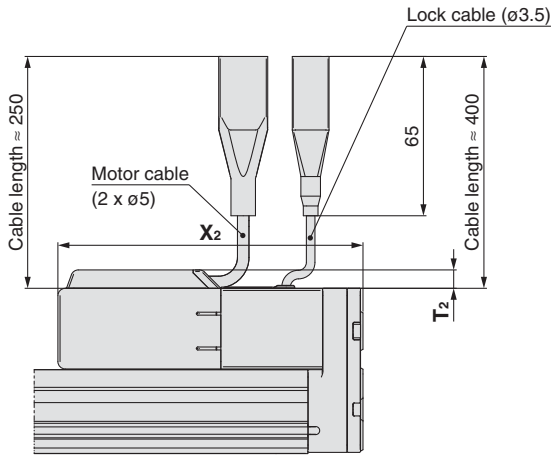

[mm]

Size	T ₂	X ₂
16	7.5	124.5
25	7.5	129
32	7.5	141.5
40	7.5	163.5

In-line motor type
 With lock/motor cover: LEYG $\begin{matrix} 16 \\ 25 \\ 32 \\ 40 \end{matrix} D \square \begin{matrix} A \\ B \\ C \end{matrix} \square W$

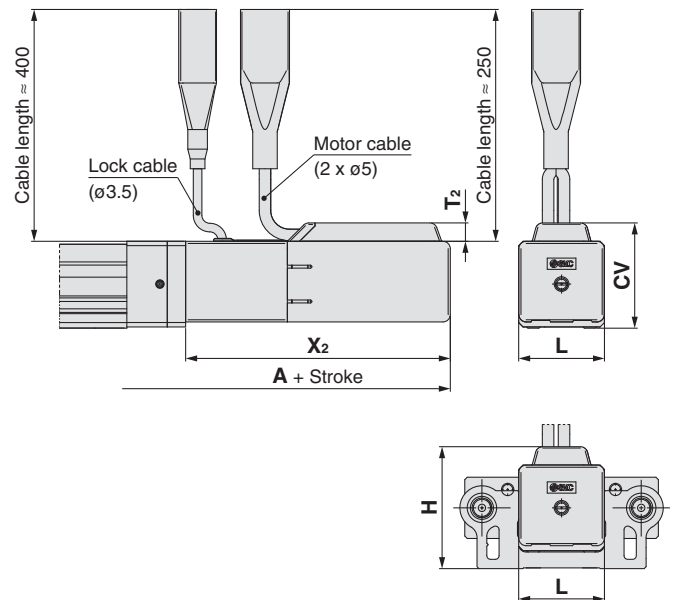

[mm]

Size	Stroke range	A	T ₂	X ₂	L	H	CV
16	100st or less	218.5	7.5	108	35	49.8	43
	101st or more, 300st or less	238.5					
25	100st or less	250	7.5	109	46	61.3	54.4
	101st or more, 300st or less	275					
32	100st or less	275	7.5	116.5	60	75.8	68.5
	101st or more, 300st or less	305					
40	100st or less	297	7.5	138.5	60	75.8	68.5
	101st or more, 300st or less	327					

Series **LEYG**

Step Motor (Servo/24 VDC) Servo Motor (24 VDC)

Support Block




●Guide for support block application

When the stroke exceeds 100 mm and the mounting orientation is horizontal, the body will be bent. Mounting the support block is recommended. (Please order it separately from the models shown below.)

Support Block Model

LEYG-S **016**

● Size	
016	For size 16
025	For size 25
032	For size 32, 40

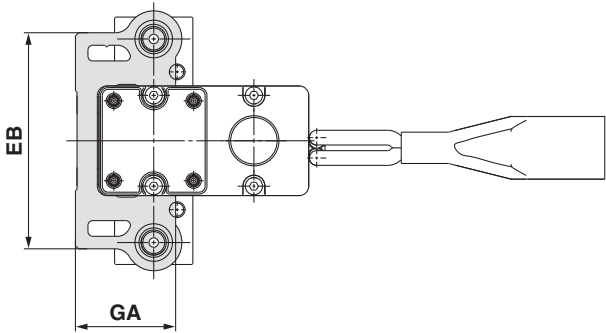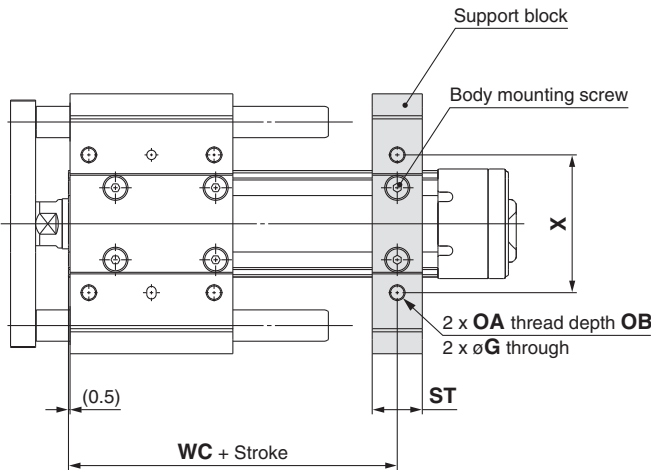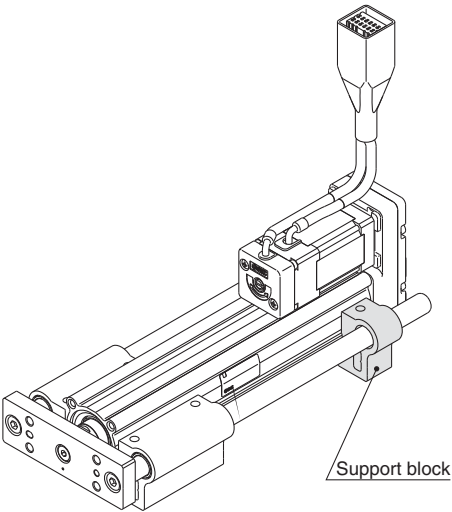

⚠Caution

Do not install the body using only a support block.
The support block should be used only for support.

[mm]										
Size	Model	Stroke range	EB	G	GA	OA	OB	ST	WC	X
16	LEYG-S016	100st or less	69	4.3	31.8	M5 x 0.8	10	16	55	44
		101st or more, 200st or less							75	
25	LEYG-S025	100st or less	85	5.4	40.3	M6 x 1.0	12	20	70	54
		101st or more, 300st or less							95	
32 40	LEYG-S032	100st or less	101	5.4	50.3	M6 x 1.0	12	22	75	64
		101st or more, 300st or less							105	

* Two body mounting screws are included with the support block.

LAT3

Motorless

LECYM
LECYU

LECSS-T

LECS

LEC

25A-

11-LEJS

11-LEFS

LEY-X5

LEH

LER

LEPY
LEPS

LES
LESH

LEY
LEYG

LEM

LEL

LEJS
LEJB

LEFS
LEFB

Electric Actuator/ Guide Rod Type

Series **LEYG** LEYG25, 32



Motorless Type ▶ Page 847

SSCNET III/H Compatible ▶ Page 635

MECHATROLINK Compatible ▶ Page 741

How to Order

LEY **H** **G** **25** **M** **S2** **B** - **100** - **S** **2** **A1**

1 2 3 4 5 6 7 8 9 10 11 12 13

1 Accuracy

Nil	Basic type
H	High precision type

2 Size

25
32

3 Bearing type

M	Sliding bearing
L	Ball bushing bearing

4 Motor mounting position

Nil	Top mounting
D	In-line

5 Motor type*1

Symbol	Type	Output [W]	Actuator size	Compatible driver*2
S2	AC servo motor (Incremental encoder)	100	25	LECSA□-S1
S3	AC servo motor (Incremental encoder)	200	32	LECSA□-S3
S6	AC servo motor (Absolute encoder)	100	25	LECSB□-S5 LECSC□-S5 LECSS□-S5
S7	AC servo motor (Absolute encoder)	200	32	LECSB□-S7 LECSC□-S7 LECSS□-S7

*1 For motor type S2 and S6, the compatible driver part number suffixes are S1 and S5 respectively.

*2 For details about the driver, refer to page 598.

6 Lead [mm]

Symbol	LEYG25	LEYG32*
A	12	16 (20)
B	6	8 (10)
C	3	4 (5)

* The values shown in () are the lead for size 32 top mounting types. (Equivalent lead which includes the pulley ratio [1.25:1])

7 Stroke [mm]

30	30
to	to
300	300

* Refer to the applicable stroke table.

* There is a limit for mounting size 32 top mounting type and 50 mm stroke or less. Refer to the dimensions.

8 Motor option

Nil	Without option
B	With lock

9 Guide option

Nil	Without option
F	With grease retaining function

* Only available for size 25 and 32 sliding bearings. (Refer to "Construction" on page 290.)

10 Cable type*

Nil	Without cable
S	Standard cable
R	Robotic cable (Flexible cable)

* The motor and encoder cables are included. (The lock cable is also included when the motor with lock option is selected.)

* Standard cable entry direction is

- Top mounting: (A) Axis side
- In-line: (B) Counter axis side

(Refer to page 614 for details.)

11 Cable length* [m]

Nil	Without cable
2	2
5	5
A	10

* The length of the encoder, motor and lock cables are the same.


* Applicable stroke table

●: Standard


Model \ Stroke [mm]	30	50	100	150	200	250	300	Manufacturable stroke range
LEYG25	●	●	●	●	●	●	●	15 to 300
LEYG32	●	●	●	●	●	●	●	20 to 300

Note) Please consult with SMC for non-standard strokes as they are produced as special orders.

For auto switches, refer to pages 243 and 244.



Motor mounting position: Top mounting



Motor mounting position: In-line

12 Driver type*

	Compatible driver	Power supply voltage [V]
Nil	Without driver	—
A1	LECSA1-S□	100 to 120
A2	LECSA2-S□	200 to 230
B1	LECSB1-S□	100 to 120
B2	LECSB2-S□	200 to 230
C1	LECSC1-S□	100 to 120
C2	LECSC2-S□	200 to 230
S1	LECSS1-S□	100 to 120
S2	LECSS2-S□	200 to 230

* When the driver type is selected, the cable is included.
Select cable type and cable length.
Example)
S2S2: Standard cable (2 m) + Driver (LECSS2)
S2 : Standard cable (2 m)
Nil : Without cable and driver

13 I/O cable length [m]*





Nil	Without cable
H	Without cable (Connector only)
1	1.5

* When "Without driver" is selected for driver type, only "Nil: Without cable" can be selected.
Refer to page 615 if I/O cable is required.
(Options are shown on page 615.)

Use of auto switches for the guide rod type LEYG series

- Insert the auto switch from the front side with rod (plate) sticking out.
- For the parts hidden behind the guide attachment (Rod stick out side), the auto switch cannot be fixed.
- Please consult with SMC when using auto switch on the rod stick out side, as it is produced as a special order.

Compatible Driver

Driver type	Pulse input type /Positioning type	Pulse input type	CC-Link direct input type	SSCNET Ⅲ type
				
Series	LECSA	LECSB	LECSC	LECSS
Number of point tables	Up to 7	—	Up to 255 (2 stations occupied)	—
Pulse input	○	○	—	—
Applicable network	—	—	CC-Link	SSCNET Ⅲ type
Control encoder	Incremental 17-bit encoder	Absolute 18-bit encoder	Absolute 18-bit encoder	Absolute 18-bit encoder
Communication function	USB communication	USB communication, RS422 communication	USB communication, RS422 communication	USB communication
Power supply voltage [V]	100 to 120 VAC (50/60 Hz) 200 to 230 VAC (50/60 Hz)			
Reference page	Page 598			

Series LEYG

AC Servo Motor

Specifications

Model		LEYG25□S ² ₆ (Top mounting) LEYG25□DS ² ₆ (In-line)			LEYG32□S ³ ₇ (Top mounting)			LEYG32□DS ³ ₇ (In-line)			
Actuator specifications	Stroke [mm] ^{Note 1)}	30, 50, 100, 150, 200, 250, 300			30, 50, 100, 200, 250, 300			30, 50, 100, 200, 250, 300			
	Work load [kg]	Horizontal ^{Note 2)}	18	50	50	30	60	60	30	60	60
		Vertical	7	15	29	7	17	35	10	22	44
	Pushing force [N] ^{Note 3)} (Set value: 15 to 30%)	65 to 131	127 to 255	242 to 485	79 to 157	154 to 308	294 to 588	98 to 197	192 to 385	368 to 736	
	Max. speed [mm/s]	900	450	225	1200	600	300	1000	500	250	
	Pushing speed [mm/s ²] ^{Note 4)}	35 or less			30 or less			30 or less			
	Max. acceleration/deceleration [mm/s ²]	5000			5000						
	Positioning repeatability [mm]	Basic type				±0.02					
		High precision type				±0.01					
	Lost motion ^{Note 5)} [mm]	Basic type				0.1 or less					
		High precision type				0.05 or less					
	Lead [mm] (including pulley ratio)	12	6	3	20	10	5	16	8	4	
	Impact/Vibration resistance [m/s ²] ^{Note 6)}	50/20			50/20						
Actuation type	Ball screw + Belt [1:1]/Ball screw			Ball screw + Belt [1:1.25]			Ball screw				
Guide type	Sliding bearing (LEYG□M), Ball bushing bearing (LEYG□L)										
Operating temperature range [°C]	5 to 40			5 to 40							
Operating humidity range [%RH]	90 or less (No condensation)			90 or less (No condensation)							
Required conditions for ^{Note 7)} "Regeneration option" [kg]	Horizontal	8 or more	31 or more	Not required	15 or more	Not required	Not required	23 or more	Not required	Not required	
	Vertical	2 or more	1 or more	1 or more	4 or more	5 or more	9 or more	4 or more	5 or more	9 or more	
Motor output/Size	100 W/□40			200 W/□60							
Motor type	AC servo motor (100/200 VAC)			AC servo motor (100/200 VAC)							
Encoder	Motor type S2, S3: Incremental 17-bit encoder (Resolution: 131072 p/rev) Motor type S6, S7: Absolute 18-bit encoder (Resolution: 262144 p/rev)										
Power consumption [W] ^{Note 8)}	Horizontal	45			65			65			
	Vertical	145			175			175			
Standby power consumption when operating [W] ^{Note 9)}	Horizontal	2			2			2			
	Vertical	8			8			8			
Max. instantaneous power consumption [W] ^{Note 10)}	445			724			724				
Type ^{Note 11)}	Non-magnetizing lock			Non-magnetizing lock							
Holding force [N]	131	255	485	157	308	588	197	385	736		
Power consumption at 20°C [W] ^{Note 12)}	6.3			7.9			7.9				
Rated voltage [V]	24 VDC ⁰ _{-10%}										

Note 1) Please consult with SMC for non-standard strokes as they are produced as special orders.

Note 2) The maximum value of the horizontal work load. An external guide is necessary to support the load. The actual work load changes according to the condition of the external guide. Please confirm using actual device.

Note 3) The force setting range (set values for the driver) for the pushing operation with the torque control mode, etc. Set it with reference to "Force Conversion Graph" on page 274.

Note 4) The allowable collision speed for the pushing operation with the torque control mode, etc.

Note 5) A reference value for correcting an error in reciprocal operation.

Note 6) Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. Test was performed in both an

axial direction and a perpendicular direction to the lead screw. (Test was performed with the actuator in the initial state.)

Note 7) The work load conditions which require "Regeneration option" when operating at the maximum speed (Duty ratio: 100%). Order the regeneration option separately. For details and order numbers, refer to "Required Conditions for Regeneration Option" on page 273.

Note 8) The power consumption (including the driver) is for when the actuator is operating.

Note 9) The standby power consumption when operating (including the driver) is for when the actuator is stopped in the set position during operation.

Note 10) The maximum instantaneous power consumption (including the driver) is for when the actuator is operating.

Note 11) Only when motor option "With lock" is selected.

Note 12) For an actuator with lock, add the power consumption for the lock.

Weight

Weight: Top Mounting Type

Series		LEYG25M							LEYG32M						
Motor type	Stroke [mm]	30	50	100	150	200	250	300	30	50	100	150	200	250	300
	Incremental encoder	1.80	1.99	2.31	2.73	3.07	3.41	3.67	3.24	3.50	4.05	4.80	5.35	5.83	6.28
	Absolute encoder	1.86	2.05	2.37	2.79	3.13	3.47	3.73	3.18	3.44	3.99	4.74	5.29	5.77	6.22
Series		LEYG25L							LEYG32L						
Motor type	Stroke [mm]	30	50	100	150	200	250	300	30	50	100	150	200	250	300
	Incremental encoder	1.81	2.02	2.26	2.69	2.95	3.27	3.51	3.24	3.51	3.9	4.64	5.06	5.56	5.96
	Absolute encoder	1.87	2.08	2.32	2.75	3.01	3.33	3.57	3.18	3.45	3.84	4.58	5.00	5.50	5.90

Weight: In-line Motor Type

Series		LEYG25MD							LEYG32MD						
Stroke [mm]		30	50	100	150	200	250	300	30	50	100	150	200	250	300
Motor type	Incremental encoder	1.83	2.02	2.34	2.76	3.10	3.44	3.70	3.26	3.52	4.07	4.82	5.37	5.85	6.30
	Absolute encoder	1.89	2.08	2.40	2.82	3.16	3.50	3.76	3.20	3.46	4.01	4.76	5.31	5.79	6.24


Series		LEYG25LD							LEYG32LD						
Stroke [mm]		30	50	100	150	200	250	300	30	50	100	150	200	250	300
Motor type	Incremental encoder	1.84	2.05	2.29	2.72	2.98	3.30	3.54	3.26	3.53	3.92	4.66	5.08	5.58	5.98
	Absolute encoder	1.90	2.11	2.35	2.78	3.04	3.36	3.60	3.20	3.47	3.86	4.60	5.02	5.52	5.92

Additional Weight


Size		25	32
Lock	Incremental encoder	0.20	0.40
	Absolute encoder	0.30	0.66

Construction


Motor mounting position: Top mounting type

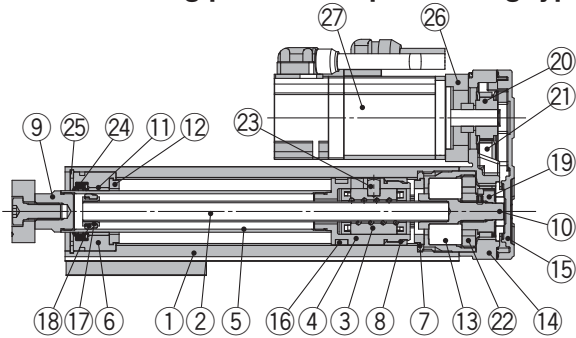

Motor mounting position: In-line type

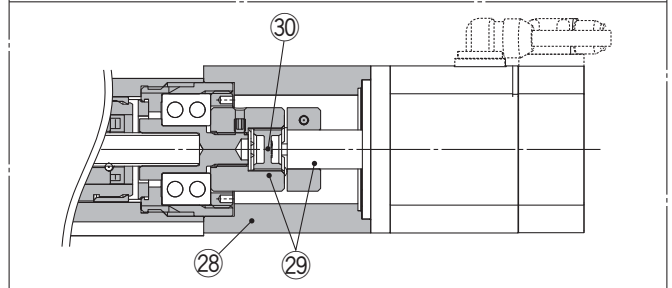

LEYG□M

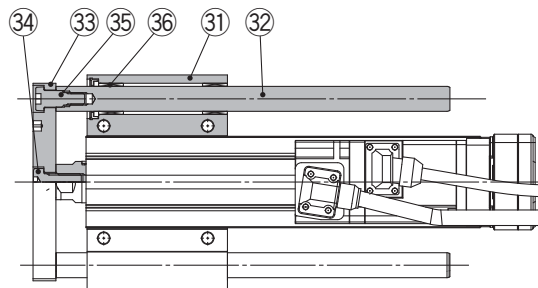

LEYG25/32M: 50st or less




LEYG25/32M: Over 50st



When grease retaining function selected


LEYG25/32M: 50st or less

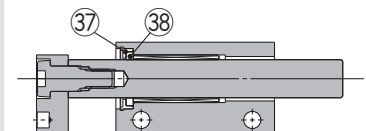


LEYG25/32M: Over 50st




LEYG□L

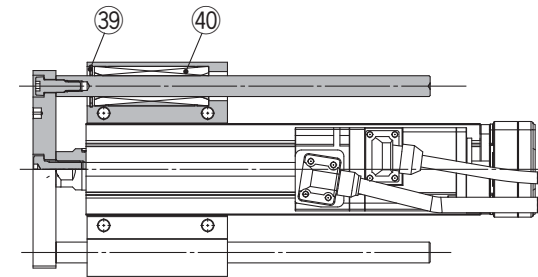

LEYG25/32L: 100st or less



LEYG25/32L: Over 100st



Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Ball screw shaft	Alloy steel	
3	Ball screw nut	—	
4	Piston	Aluminum alloy	
5	Piston rod	Stainless steel	Hard chrome plating
6	Rod cover	Aluminum alloy	
7	Housing	Aluminum alloy	
8	Rotation stopper	POM	
9	Socket	Free cutting carbon steel	Nickel plating
10	Connected shaft	Free cutting carbon steel	Nickel plating
11	Bushing	Lead bronze cast	
12	Bumper	Urethane	
13	Bearing	—	
14	Return box	Aluminum die-cast	Coating
15	Return plate	Aluminum die-cast	Coating
16	Magnet	—	
17	Wear ring holder	Stainless steel	Stroke 101 mm or more
18	Wear ring	POM	Stroke 101 mm or more
19	Screw shaft pulley	Aluminum alloy	
20	Motor pulley	Aluminum alloy	
21	Belt	—	
22	Bearing stopper	Aluminum alloy	
23	Parallel pin	Stainless steel	
24	Seal	NBR	
25	Retaining ring	Steel for spring	Phosphate coated
26	Motor adapter	Aluminum alloy	Coating
27	Motor	—	

No.	Description	Material	Note
28	Motor block	Aluminum alloy	Coating
29	Hub	Aluminum alloy	
30	Spider	Urethane	Spider
31	Guide attachment	Aluminum alloy	Anodized
32	Guide rod	Carbon steel	
33	Plate	Aluminum alloy	Anodized
34	Plate mounting cap screw	Carbon steel	Nickel plating
35	Guide cap screw	Carbon steel	Nickel plating
36	Sliding bearing	—	
37	Felt	Felt	
38	Holder	Resin	
39	Retaining ring	Steel for spring	Phosphate coated
40	Ball bushing	—	
41	Spacer	Aluminum alloy	Chromated

Support Block

Size	Order no.
25	LEYG-S025
32	LEYG-S032

* Two body mounting screws are included with the support block.

Replacement Parts /Belt


Size	Order no.
25	LE-D-2-2
32	LE-D-2-4

Replacement Parts/Grease Pack

Applied portion	Order no.
Piston rod	GR-S-010 (10 g)
Guide rod	GR-S-020 (20 g)


* Apply grease on the piston rod periodically.
Grease should be applied at 1 million cycles or 200 km, whichever comes first.

Dimensions: Top Mounting

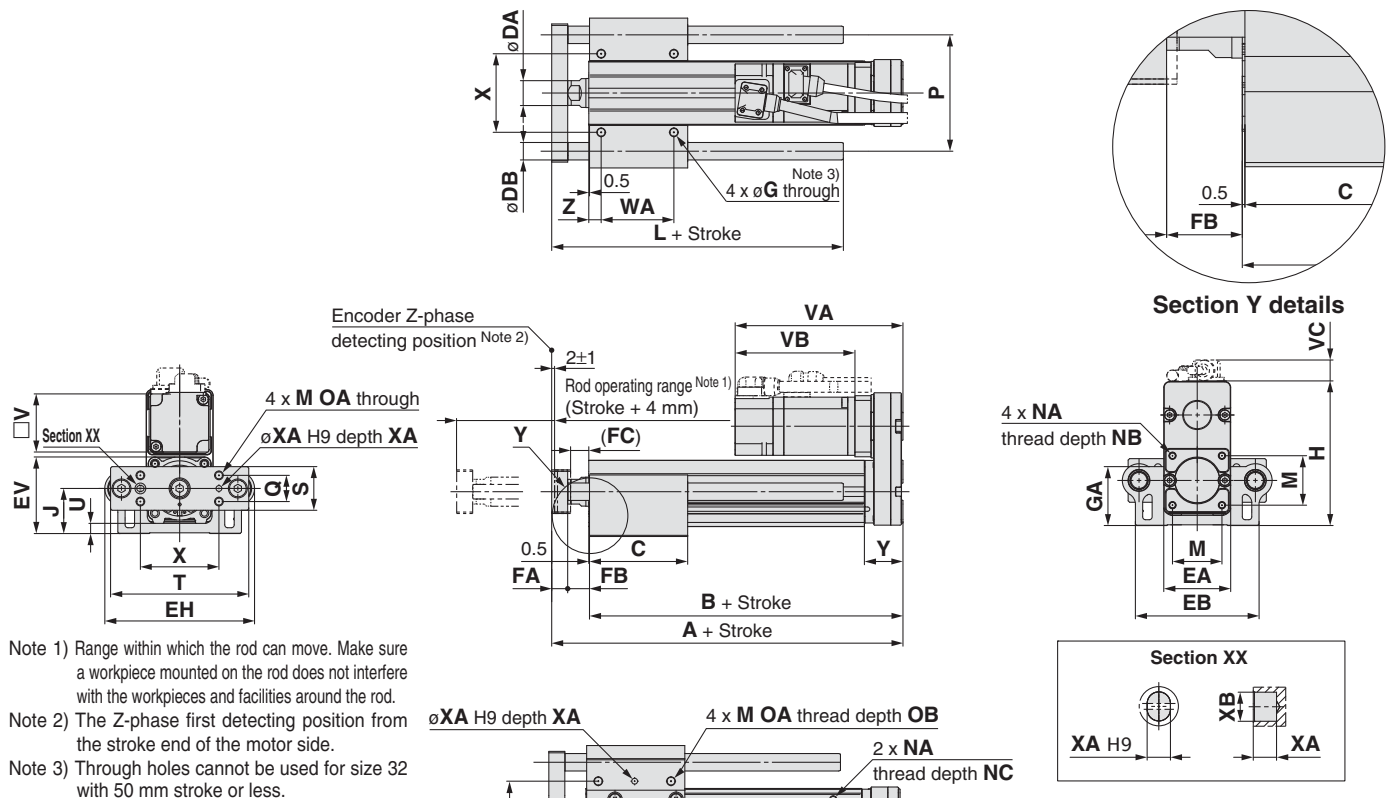

LEYG□L (Ball bushing bearing) [mm]

Size	Stroke range [mm]	L	DB
25	Up to 114	91	10
	115 to 190	115	
	191 to 300	133	
32	Up to 114	97.5	13
	115 to 190	116.5	
	191 to 300	134	

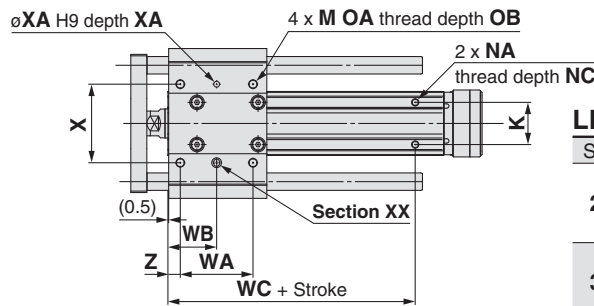

LEYG□M (Sliding bearing) [mm]

Size	Stroke range [mm]	L	DB
25	Up to 59	67.5	12
	60 to 185	100.5	
	186 to 300	138	
32	Up to 59	74	16
	60 to 185	107	
	186 to 300	144	


LEYG□M, LEYG□L Common

Size	Stroke range [mm]	A	B	C	DA	EA	EB	EH	EV	FA	FB	FC	G	GA	H	J	K	M	NA	NB	NC
25	Up to 39	141.5	116	50	20	46	85	103	52.3	11	14.5	12.5	5.4	40.3	98.8	30.8	29	34	M5 x 0.8	8	6.5
	40 to 100			67.5																	
	101 to 124	166.5	141	84.5																	
	125 to 200			102																	
	201 to 300			102																	
32	Up to 39	160.5	130	55	25	60	101	123	63.8	12	18.5	16.5	5.4	50.3	125.3	38.3	30	40	M6 x 1.0	10	8.5
	40 to 100			68																	
	101 to 124	190.5	160	85																	
	125 to 200			102																	
	201 to 300			102																	

Size	Stroke range [mm]	OA	OB	P	Q	S	T	U	V	WA	WB	WC	X	XA	XB	Y	Z					
25	Up to 39	M6 x 1.0	12	80	18	30	95	6.8	40	35	26	70	54	4	5	26.5	8.5					
	40 to 100									50	33.5											
	101 to 124									70	43.5	95						64	5	6	34	8.5
	125 to 200									85	51											
	201 to 300									85	51											
32	Up to 39	M6 x 1.0	12	95	28	40	117	7.3	60	40	28.5	75	64	5	6	34	8.5					
	40 to 100									50	33.5											
	101 to 124									70	43.5	105						64	5	6	34	8.5
	125 to 200									85	43.5											
	201 to 300									85	51											

Size	Incremental encoder						Absolute encoder					
	Without lock			With lock			Without lock			With lock		
	VA	VB	VC	VA	VB	VC	VA	VB	VC	VA	VB	VC
25	120	87	14.1	156.9	123.9	15.8	115.4	82.4	14.1	156.5	123.5	15.8
32	128.2	88.2	17.1	156.8	116.8	17.1	116.6	76.6	17.1	156.1	116.1	17.1

Dimensions: In-line Motor

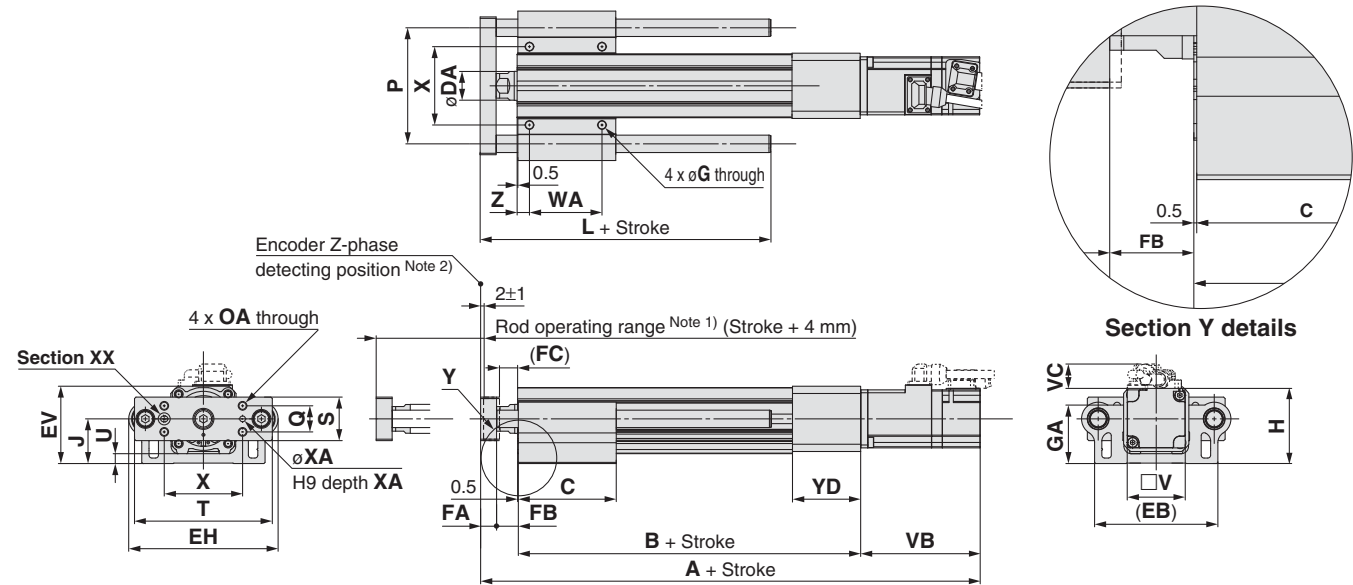

Note 1) Range within which the rod can move.

Make sure a workpiece mounted on the rod does not interfere with the workpieces and facilities around the rod.

Note 2) The Z-phase first detecting position from the stroke end of the motor side.

LEYG□L (Ball bushing bearing) [mm]

Size	Stroke range [mm]	L	DB
25	Up to 114	91	10
	115 to 190	115	
	191 to 300	133	
32	Up to 114	97.5	13
	115 to 190	116.5	
	191 to 300	134	

LEYG□M (Sliding bearing) [mm]

Size	Stroke range [mm]	L	DB
25	Up to 59	67.5	12
	60 to 185	100.5	
	186 to 300	138	
32	Up to 59	74	16
	60 to 185	107	
	186 to 300	144	

LEYG□M, LEYG□L Common [mm]

Size	Stroke range [mm]	B	C	DA	EB	EH	EV	FA	FB	FC	G	GA	H	J	K	NA	NC
25	Up to 39	136.5	50	20	85	103	52.3	11	14.5	12.5	5.4	40.3	53.3	30.8	29	M5 x 0.8	6.5
	40 to 100		67.5														
	101 to 124	161.5	84.5														
	125 to 200		102														
	201 to 300		55														
32	Up to 39	156	55	25	101	123	63.8	12	18.5	16.5	5.4	50.3	68.3	38.3	30	M6 x 1.0	8.5
	40 to 100		68														
	101 to 124	186	85														
	125 to 200		102														
	201 to 300		55														
Size	Stroke range [mm]	OA	OB	P	Q	S	T	U	V	WA	WB	WC	X	XA	XB	YD	Z
25	Up to 39	M6 x 1.0	12	80	18	30	95	6.8	40	35	26	70	54	4	5	47	8.5
	40 to 100									50	33.5						
	101 to 124									70	43.5	95					
	125 to 200									85	51						
	201 to 300									40	28.5						
32	Up to 39	M6 x 1.0	12	95	28	40	117	7.3	60	40	28.5	75	64	5	6	60	8.5
	40 to 100									50	33.5						
	101 to 124									70	43.5	105					
	125 to 200									85	51						
	201 to 300									40	28.5						
Size	Stroke range [mm]	Incremental encoder						Absolute encoder									
		Without lock			With lock			Without lock			With lock						
		A	VB	VC	A	VB	VC	A	VB	VC	A	VB	VC				
25	15 to 100	249	87	14.6	285.9	123.9	16.3	244.4	82.4	14.6	285.5	123.5	16.3				
	105 to 300	274			310.9			269.4			315.5						
32	15 to 100	274.7	88.2	17.1	303.3	116.8	17.1	263.1	76.6	17.1	302.6	116.1	17.1				
	105 to 300	304.7			333.3			293.1			332.6						

Support Block

●Guide for support block application



When the stroke exceeds 100 mm and the mounting orientation is horizontal, the body will be bent. Mounting the support block is recommended. (Please order it separately from the models shown below.)

Support Block Model

LEYG-S **025**

●Size

025	For size 25
032	For size 32

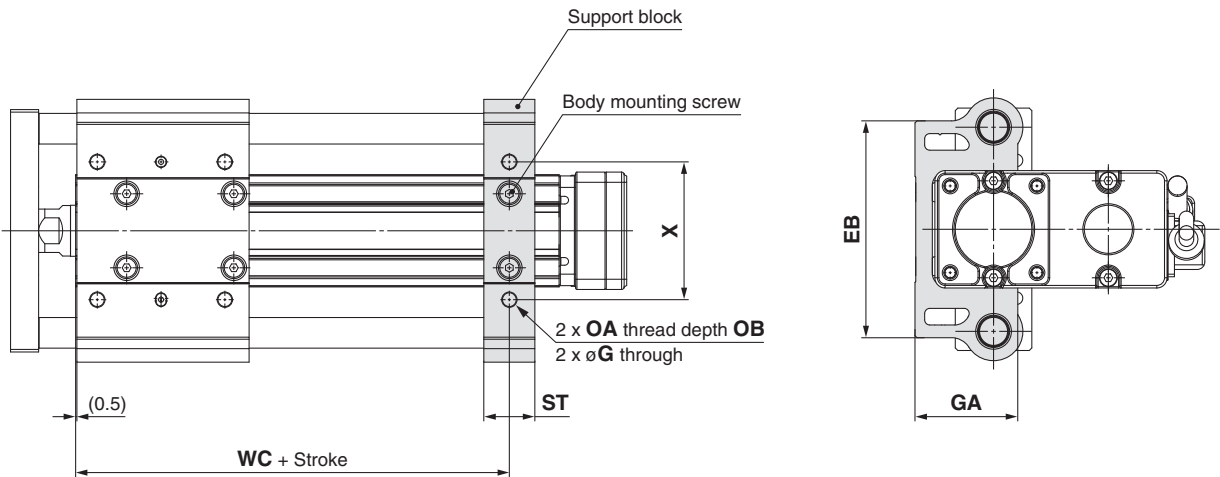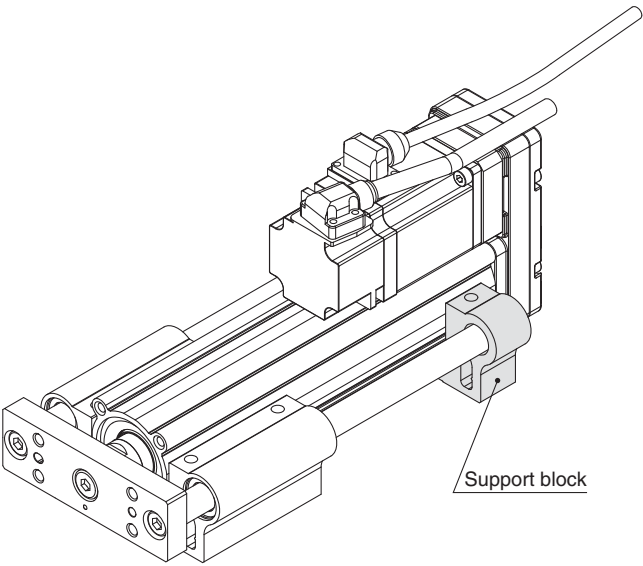

⚠Caution

Do not install the body using only a support block.
The support block should be used only for support.

[mm]										
Size	Model	Stroke range	EB	G	GA	OA	OB	ST	WC	X
25	LEYG-S025	100st or less	85	5.4	40.3	M6 x 1.0	12	20	70	54
		101st or more, 300st or less							95	
32	LEYG-S032	100st or less	101	5.4	50.3	M6 x 1.0	12	22	75	64
		101st or more, 300st or less							105	

* Two body mounting screws are included with the support block.



Series LEY/LEYG Electric Actuators/ Specific Product Precautions 1

Be sure to read this before handling. Refer to page 906 for Safety Instructions. For Electric Actuator Precautions, refer to pages 907 to 912, or “Handling Precautions for SMC Products” and the Operation Manual on SMC website, <http://www.smworld.com>

Design/Selection

Warning

- Do not apply a load in excess of the specification limits.**
Select a suitable actuator by work load and allowable lateral load on the rod end. If the product is used outside of the specification limits, the eccentric load applied to the piston rod will be excessive and have adverse effects such as creating play on the sliding parts of the piston rod, degrading accuracy and shortening the life of the product.
- Do not use the product in applications where excessive external force or impact force is applied to it.**
This can cause failure.
- When used as a stopper, select the LEYG series “Sliding bearing” for a stroke of 30 mm or less.**
- When used as a stopper, fix the main body with a guide attachment (“Top mounting” or “Bottom mounting”).**

If the end of the actuator is used to fix the main body (end mounting), the excessive load acts on the actuator, which adversely affects the operation and life of the product.

Handling

Caution

1. INP output signal

1) Positioning operation

When the product comes within the set range by step data [In position], the INP output signal will turn on.

Initial value: Set to [0.50] or higher.

2) Pushing operation

When the effective force exceeds step data [Trigger LV], the INP output signal will turn on.

Use the product within the specified range of [Pushing force] and [Trigger LV].

- To ensure that the actuator pushes the workpiece with the set [Pushing force], it is recommended that the [Trigger LV] be set to the same value as the [Pushing force].
- When the [Pushing force] and [Trigger LV] are set less than the specified range, the INP output signal will turn on from the pushing start position.

<Pushing Force and Trigger Level Range> Without load/With lateral load on rod end

Model	Pushing speed [mm/s]	Pushing force (Setting input value)	Model	Pushing speed [mm/s]	Pushing force (Setting input value)
LEY□16□	1 to 4	30% to 85%	LEY□16□A	1 to 4	40% to 95%
	5 to 20	35% to 85%		5 to 20	60% to 95%
	21 to 50	60% to 85%		21 to 50	80% to 95%
LEY□25□	1 to 4	20% to 65%	LEY□25□A	1 to 4	40% to 95%
	5 to 20	35% to 65%		5 to 20	60% to 95%
	21 to 35	50% to 65%		21 to 35	80% to 95%
LEY□32□	1 to 4	20% to 85%	* The pushing force in the table shows the range within which the completion signal [INP] is normally output. If the product is operated outside this range (low pushing force), the [INP] signal may be output when the actuator is moving (before pushing).		
	5 to 20	35% to 85%			
	21 to 30	60% to 85%			
LEY□40□	1 to 4	20% to 65%			
	5 to 20	35% to 65%			
	21 to 30	50% to 65%			

Handling

Caution

<Set Values for Vertical Upward Transfer Pushing Operation>

For vertical loads (upward), set the pushing force to the maximum value shown below, and operate at the work load or less.

Model	LEY16□			LEY25□			LEY32□			LEY40□		
Lead	A	B	C	A	B	C	A	B	C	A	B	C
Work load [kg]	1	1.5	3	2.5	5	10	4.5	9	18	7	14	28
Pushing force	85%			65%			85%			65%		

Model	LEY16□A			LEY25□A		
Lead	A	B	C	A	B	C
Work load [kg]	1	1.5	3	1.2	2.5	5
Pushing force	95%			95%		

Model	LEYG16□			LEYG25□			LEYG32□			LEYG40□		
Lead	A	B	C	A	B	C	A	B	C	A	B	C
Work load [kg]	0.5	1	2.5	1.5	4	9	2.5	7	16	5	12	26
Pushing force	85%			65%			85%			65%		

Model	LEYG16□A			LEYG25□A		
Lead	A	B	C	A	B	C
Work load [kg]	0.5	1	2.5	0.5	1.5	4
Pushing force	95%			95%		

- When the pushing operation is used, be sure to set to [Pushing operation].**

Also, do not hit the workpiece in positioning operation or in the range of positioning operation. It may malfunction.

- Use the product within the specified pushing speed range for the pushing operation.**

It may lead to damage and malfunction.

- The moving force should be the initial value (LEY16 □/25□/32□/40□: 100%, LEY16A□: 150%, LEY25A□: 200%).**

If the moving force is set below the initial value, it may cause an alarm.

- The actual speed of this actuator is affected by the load.**

Check the model selection section of the catalog.

- Do not apply a load, impact or resistance in addition to the transferred load during return to origin.**

Additional force will cause the displacement of the origin position since it is based on detected motor torque.

- In pushing operation, set the product to a position of at least 2 mm away from a workpiece. (This position is referred to as a pushing start position.)**

The following alarms may be generated and operation may become unstable.

a. “Posn failed” alarm is generated.

The product cannot reach a pushing start position due to variation in the target position.

b. “Pushing ALM” alarm is generated.

The product is pushed back from a pushing start position after starting to push.



Series LEY/LEYG Electric Actuators/ Specific Product Precautions 2

Be sure to read this before handling. Refer to page 906 for Safety Instructions. For Electric Actuator Precautions, refer to pages 907 to 912, or “Handling Precautions for SMC Products” and the Operation Manual on SMC website, <http://www.smcworld.com>

Handling

Caution

8. Do not scratch or dent the sliding parts of the piston rod, by striking or attaching objects.

The piston rod and guide rod are manufactured to precise tolerances, even a slight deformation may cause malfunction.

9. When an external guide is used, connect it in such a way that no impact or load is applied to it.

Use a freely moving connector (such as a floating joint).

10. Do not operate by fixing the piston rod and moving the actuator body.

Excessive load will be applied to the piston rod, leading to damage to the actuator and reduced the life of the product.

11. When an actuator is operated with one end fixed and the other free (ends tapped or flange type), a bending moment may act on the actuator due to vibration generated at the stroke end, which can damage the actuator. In such a case, install a mounting bracket to suppress the vibration of the actuator body or reduce the speed so that the actuator does not vibrate at the stroke end.

Also, use a mounting bracket when moving the actuator body or when a long stroke actuator is mounted horizontally and fixed at one end.


12. Avoid using the electric actuator in such a way that rotational torque would be applied to the piston rod.

This may cause deformation of the non-rotating guide, abnormal responses of the auto switch, play in the internal guide or an increase in the sliding resistance.

Refer to the table below for the approximate values of the allowable range of rotational torque.

Allowable rotational torque [N·m] or less	LEY16□□	LEY25□□	LEY32/40□□	LEY63
	0.8	1.1	1.4	2.8

When screwing in a bracket or nut to the end of the piston rod, hold the flats of the rod end with a wrench (the piston rod should be fully retracted). Do not apply tightening torque to the non-rotating mechanism.

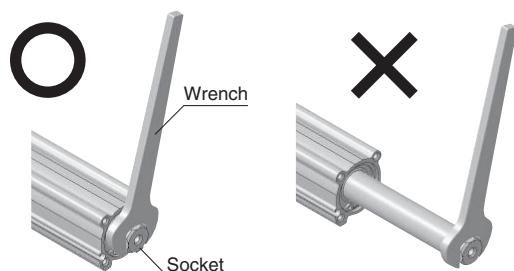

13. When rotational torque is applied to the end of the plate, use it within the allowable range. [Series LEYG]

This may cause deformation of the guide rod and bushing, play in the guide or an increase in the sliding resistance.

14. For the pushing operation, use the product within the duty ratio range below.

The duty ratio is a ratio at the time that can keep being pushed.

• Step motor (Servo/24 VDC)

LEY16□

Pushing force [%]	Ambient temperature: 25°C or less		Ambient temperature: 40°C	
	Duty ratio [%]	Continuous pushing time [minute]	Duty ratio [%]	Continuous pushing time [minute]
40 or less	100	—	100	—
50			70	12
70			20	1.3
85			15	0.8

LEY25□

Pushing force [%]	Ambient temperature: 25°C or less		Ambient temperature: 40°C	
	Duty ratio [%]	Continuous pushing time [minute]	Duty ratio [%]	Continuous pushing time [minute]
65 or less	100	—	100	—

LEY32□/40□

Pushing force [%]	Ambient temperature: 25°C or less		Ambient temperature: 40°C	
	Duty ratio [%]	Continuous pushing time [minute]	Duty ratio [%]	Continuous pushing time [minute]
65 or less	100	—	100	—
85			50	15

• Servo motor (24 VDC)


LEY16A□

Pushing force [%]	Ambient temperature: 25°C or less		Ambient temperature: 40°C	
	Duty ratio [%]	Continuous pushing time [minute]	Duty ratio [%]	Continuous pushing time [minute]
95 or less	100	—	100	—

LEY25A□

Pushing force [%]	Ambient temperature: 25°C or less		Ambient temperature: 40°C	
	Duty ratio [%]	Continuous pushing time [minute]	Duty ratio [%]	Continuous pushing time [minute]
95 or less	100	—	100	—

15. When mounting the product, keep a 40 mm or longer diameter for bends in the cable.

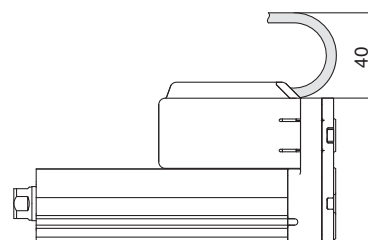

16. When mounting a bolt, workpiece or jig, hold the flats of the piston rod end with a wrench so that the piston rod does not rotate. The bolt should be tightened within the specified torque range.

This may cause abnormal responses of the auto switch, play in the internal guide or an increase in the sliding resistance.



Series LEY/LEYG

Electric Actuators/ Specific Product Precautions 3

Be sure to read this before handling. Refer to page 906 for Safety Instructions. For Electric Actuator Precautions, refer to pages 907 to 912, or “Handling Precautions for SMC Products” and the Operation Manual on SMC website, <http://www.smworld.com>

Handling


⚠ Caution

17. When mounting the product and/or a workpiece, tighten the mounting screws within the specified torque range.

Tightening the screws with a higher torque than recommended may cause a malfunction, whilst the tightening with a lower torque can cause the displacement of the mounting position or in extreme conditions the actuator could become detached from its mounting position.


<Series LEY>

Workpiece fixed/Rod end female thread




Model	Screw size	Max. tightening torque [N·m]	Max. screw-in depth [mm]	End socket width across flats [mm]
LEY16	M5 x 0.8	3.0	10	14
LEY25	M8 x 1.25	12.5	13	17
LEY32/40	M8 x 1.25	12.5	13	22
LEY63	M16 x 2	106	21	36

Workpiece fixed/Rod end male thread (When “Rod end male thread” is selected.)




Model	Thread size	Max. tightening torque [N·m]	Effective thread length [mm]	End socket width across flats [mm]
LEY16	M8 x 1.25	12.5	12	14
LEY25	M14 x 1.5	65.0	20.5	17
LEY32/40	M14 x 1.5	65.0	20.5	22
LEY63	M18 x 1.5	97.0	26	36



Model	Rod end nut	End bracket
	Width across flats [mm]	Length [mm]
LEY16	13	5
LEY25	22	8
LEY32/40	22	8
LEY63	27	11


* Rod end nut is an accessory.

Body fixed/Body bottom tapped style (When “Body bottom tapped” is selected.)



Model	Screw size	Max. tightening torque [N·m]	Max. screw-in depth [mm]
LEY16	M4 x 0.7	1.5	5.5
LEY25	M5 x 0.8	3.0	6.5
LEY32/40	M6 x 1.0	5.2	8.8
LEY63	M8 x 1.25	12.5	10

Body fixed/Rod side/Head side tapped style




Model	Screw size	Max. tightening torque [N·m]	Max. screw-in depth [mm]
LEY16	M4 x 0.7	1.5	7
LEY25	M5 x 0.8	3.0	8
LEY32/40	M6 x 1.0	5.2	10
LEY63	M8 x 1.25	12.5	16

* Except the LEY□□.


<Series LEYG>

Workpiece fixed/Plate tapped style




Model	Screw size	Max. tightening torque [N·m]	Max. screw-in depth [mm]
LEYG16 ^M	M5 x 0.8	3.0	8
LEYG25 ^M	M6 x 1.0	5.2	11
LEYG32 ^M 40 ^L	M6 x 1.0	5.2	12

Body fixed/Top mounting




Model	Screw size	Max. tightening torque [N·m]	Length: L [mm]
LEYG16 ^M	M4 x 0.7	1.5	32
LEYG25 ^M	M5 x 0.8	3.0	40.3
LEYG32 ^M 40 ^L	M5 x 0.8	3.0	50.3

Body fixed/Bottom mounting



Model	Screw size	Max. tightening torque [N·m]	Max. screw-in depth [mm]
LEYG16 ^M	M5 x 0.8	3.0	10
LEYG25 ^M	M6 x 1.0	5.2	12
LEYG32 ^M 40 ^L	M6 x 1.0	5.2	12

Body fixed/Head side tapped style



Model	Screw size	Max. tightening torque [N·m]	Max. screw-in depth [mm]
LEYG16 ^M	M4 x 0.7	1.5	7
LEYG25 ^M	M5 x 0.8	3.0	8
LEYG32 ^M 40 ^L	M6 x 1.0	5.2	10

18. Keep the flatness of the mounting surface within the following ranges when mounting the actuator body and workpiece.

Unevenness of a workpiece or base mounted on the body of the product may cause an increase in the sliding resistance.

Model	Mounting position	Flatness
LEY□	Body/Body bottom	0.1 mm or less
LEYG□	Top mounting/Bottom mounting	0.05 mm or less
LEYG□	Workpiece/Plate mounting	0.05 mm or less

19. When using auto switch with the guide rod type LEYG series, the following limits will be in effect. Please select the product while paying attention to this.

- Insert the auto switch from the front side with rod (plate) sticking out.
- The auto switches with perpendicular electrical entry cannot be used.
- For the parts hidden behind the guide attachment (Rod stick out side), the auto switch cannot be fixed.
- Please consult with SMC when using auto switch on the rod stick out side.



Series LEY/LEYG

Electric Actuators/

Specific Product Precautions 4

Be sure to read this before handling. Refer to page 906 for Safety Instructions. For Electric Actuator Precautions, refer to pages 907 to 912, or “Handling Precautions for SMC Products” and the Operation Manual on SMC website, <http://www.smcworld.com>

Enclosure

IP –

First characteristic numeral • Second characteristic numeral

• First Characteristics:

Degrees of protection against solid foreign objects

0	Non-protected
1	Protected against solid foreign objects of 50 mmø and greater
2	Protected against solid foreign objects of 12 mmø and greater
3	Protected against solid foreign objects of 2.5 mmø and greater
4	Protected against solid foreign objects of 1.0 mmø and greater
5	Dust-protected
6	Dust-tight

• Second Characteristics:

Degrees of protection against water

0	Non-protected	—
1	Protected against vertically falling water drops	Dripproof type 1
2	Protected against vertically falling water drops when enclosure tilted up to 15°	Dripproof type 2
3	Protected against rainfall when enclosure tilted up to 60°	Rainproof type
4	Protected against splashing water	Splashproof type
5	Protected against water jets	Water-jet-proof type
6	Protected against powerful water jets	Powerful water-jet-proof type
7	Protected against the effects of temporary immersion in water	Immersible type
8	Protected against the effects of continuous immersion in water	Submersible type

Example) IP65: Dust-tight, Water-jet-proof type

“Water-jet-proof type” means that no water intrudes inside an equipment that could hinder from operating normally by means of applying water for 3 minutes in the prescribed manner. Take appropriate protection measures, since a device is not usable in an environment where a droplet of water is splashed constantly.

Maintenance

⚠ Warning

1. Ensure that the power supply is stopped and the workpiece is removed before starting maintenance work or replacement of the product.

• Maintenance frequency

Perform maintenance according to the table below.

Frequency	Appearance check	Belt check
Inspection before daily operation	○	—
Inspection every 6 months/ 250 km/5 million cycles*	○	○

* Select whichever comes first.

• Items for visual appearance check

1. Loose set screws, Abnormal dirt
2. Check of flaw and cable joint
3. Vibration, Noise

• Items for belt check

Stop operation immediately and replace the belt when belt appear to be below. Further, ensure your operating environment and conditions satisfy the requirements specified for the product.

a. Tooth shape canvas is worn out

Canvas fiber becomes fuzzy. Rubber is removed and the fiber becomes whitish. Lines of fibers become unclear.

b. Peeling off or wearing of the side of the belt

Belt corner becomes round and frayed thread sticks out.

c. Belt partially cut

Belt is partially cut. Foreign matter caught in teeth other than cut part causes flaw.

d. Vertical line of belt teeth

Flaw which is made when the belt runs on the flange.

e. Rubber back of the belt is softened and sticky

f. Crack on the back of the belt