


HTO

CILINDRO TUFFANTE STANDARD  
STANDARD PLUNGER CYLINDER

Series M250

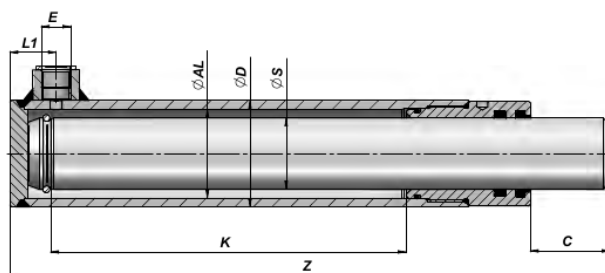

| Codice<br>Code           | K   | Z   | kg    | E<br>BSP | L1 | C  |
|--------------------------|-----|-----|-------|----------|----|----|
| ØD 50    ØAL 40    ØS 30 |     |     |       |          |    |    |
| HT02300200               | 200 | 326 | 3,67  | 3/8"     | 23 | 40 |
| HT02300250               | 250 | 376 | 4,22  |          |    |    |
| HT02300300               | 300 | 426 | 4,78  |          |    |    |
| HT02300350               | 350 | 476 | 5,33  |          |    |    |
| HT02300400               | 400 | 526 | 5,89  |          |    |    |
| HT02300500               | 500 | 626 | 7,00  |          |    |    |
| ØD 60    ØAL 50    ØS 40 |     |     |       |          |    |    |
| HT03400200               | 200 | 338 | 5,67  | 3/8"     | 26 | 45 |
| HT03400300               | 300 | 438 | 7,34  |          |    |    |
| HT03400400               | 400 | 538 | 9,00  |          |    |    |
| HT03400500               | 500 | 638 | 10,67 |          |    |    |
| HT03400600               | 600 | 738 | 12,35 |          |    |    |
| ØD 70    ØAL 60    ØS 50 |     |     |       |          |    |    |
| HT04500300               | 300 | 450 | 10,60 | 3/8"     | 30 | 50 |
| HT04500400               | 400 | 550 | 12,94 |          |    |    |
| HT04500500               | 500 | 650 | 15,28 |          |    |    |
| HT04500600               | 600 | 750 | 17,62 |          |    |    |

MATERIALE TUBO: ACCIAIO S1 52.3 DIN 2393 ISO H9

TUBE MATERIAL : STEEL S1 52.3 DIN 2393 ISO H9

MATERIALE ASTA: ACCIAIO UNI C45 SAE 1045 CROMO 25 MICRON ±5 Rating 9 / 120 h ISO 10289 - 1999/ISO 9227-NSS

ROD MATERIAL : STEEL UNI C45 SAE 1045 CHROME 25 MICRON ±5 Rating 9 / 120 h ISO 10289 - 1999/ISO 9227-NSS

CARATTERISTICHE TECNICHE : VEDI PAGINA 40 - TECHNICAL SPECIFICATIONS : SEE PAGE 40