



Pompa Tipo GLOP625 - Pump Type GLOP625

Pompa Idropneumatica con doppio pistone coassiale
Air-Hydraulic Pump with co-axial piston system



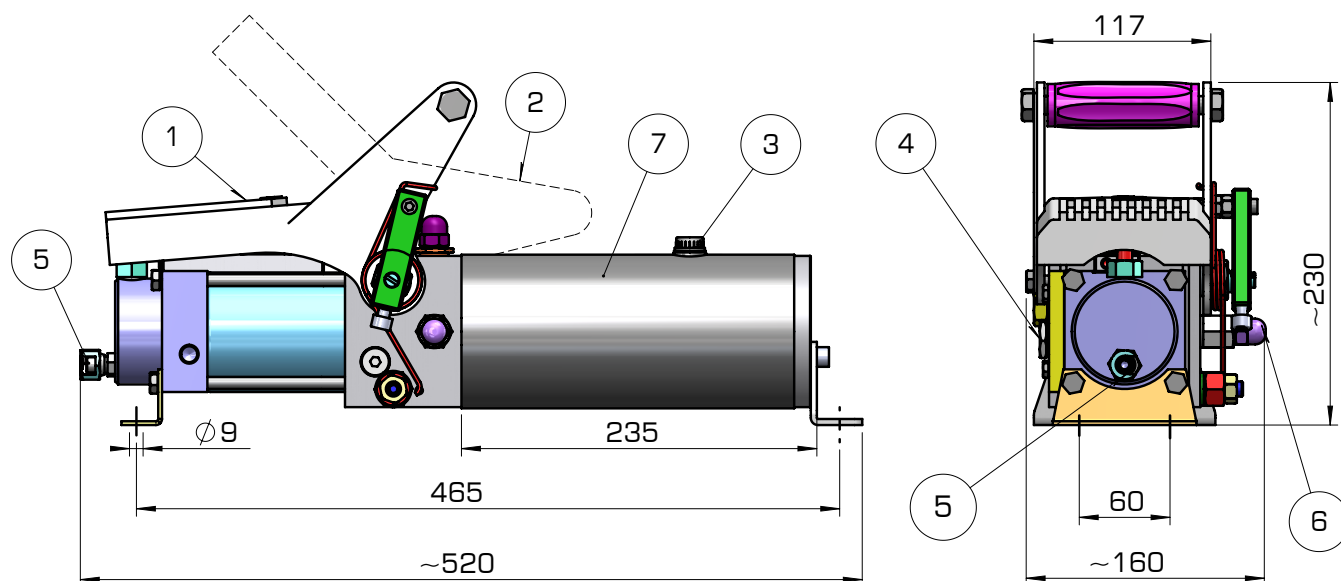


Peso (con olio) - Weight (with oil) Kg. ~14,3

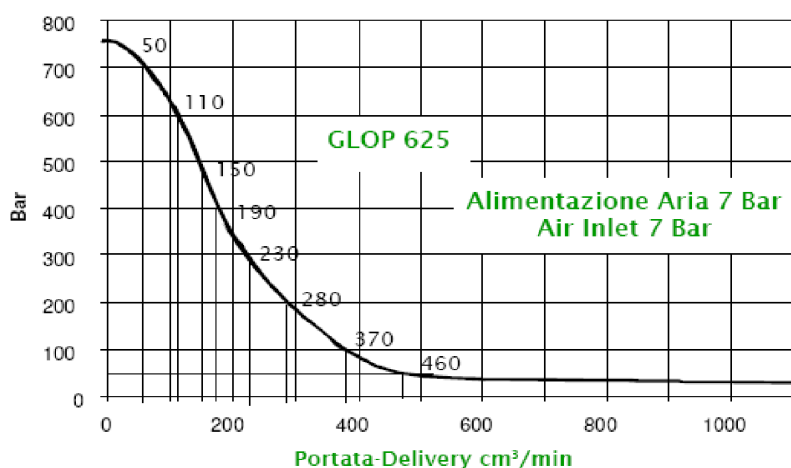

- 1 Azionamento Pompa - Pump Operation
- 2 Scarico Olio - Oil Discharge
- 3 Tappo Carico Olio - Filler Plug
- 4 Mandata Olio (1/4"Gas bspp)- Pressure Port (1/4"Gas bspp)
- 5 Alimentazione Aria (1/4"Gas bspp) - Air Inlet (1/4"Gas bspp)
- 6 Registro Max. Pressione - Relief Valve
- 7 Serbatoio L. 1,2 - Tank L. 1,2

Montaggio - Mounting Position:

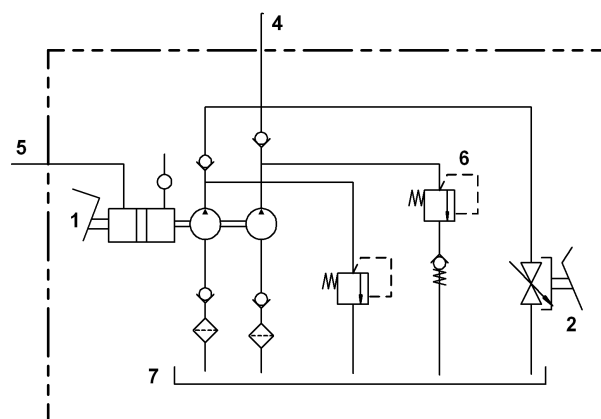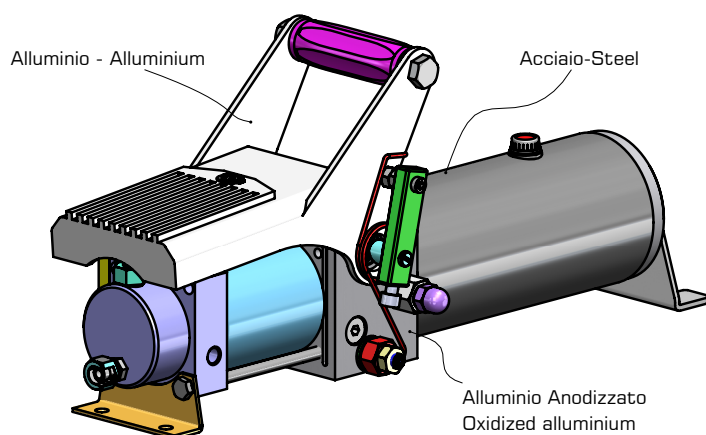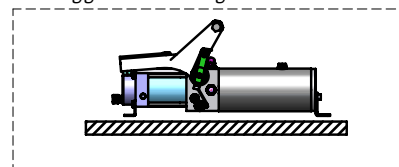

TIPO - TYPE	MANDATA OLIO - PRESSURE PORT CC/min				Pressione Pressure	Consumo D'Aria L/min Air Consumption L/min
	0 Bar oil	10 Bar oil	20 Bar oil	30 Bar oil	Air 10 Bar	
GLOP625	4000	3000	2500	2000	750 Bar	43