



THERMOPLASTIC TUBING AND HOSES



**ZEC S.p.A.**

Via Lungolorno 11 - 42052 Colorno (PR) - Italia

Tel. 0521 816631 - Fax 0521 816772

info@zecspa.com - www.zecspa.com

Capitale sociale: Euro 1.000.000

C.F., P.IVA e n. Iscr. Reg. Imprese Parma: IT01720400348

Numero REA: PR - 173914

---

## Tappi di protezione - Service plug

ACCESSORI

SCHEDA TECNICA



### Descrizione:

**SERVICE PLUG** è un innovativo e pratico sistema per i professionisti della manutenzione e in generale per tutti gli operatori tecnici.

Studiato per eliminare la fuoriuscita di oli o sostanze chimiche da tubi, **SERVICE PLUG** evita la contaminazione dei tubi e dei fluidi durante le operazioni di manutenzione e pulizia degli impianti. Inoltre, contribuisce a salvaguardare l'ambiente e mantenere pulite le aree di lavoro.

Due versioni: di COLORE VERDE per il settore oleodinamico e industriale, di COLORE BIANCO, in materiale compatibile per l'industria alimentare.

### Caratteristiche:

- Temperatura di esercizio: da -25° C a + 90°C
- Resistente ai maggiori oli e sostanze chimiche (vedi tabella sul retro)
- Per sistemi non pressurizzati
- Non contengono silicone


- I tappi sono solidi, ma è possibile tagliarli se necessario
- Sono riutilizzabili più e più volte
- Linea alimentare: sono realizzati con materiali idonei al contatto con alimenti, resistenti all'alcol

### Modelli disponibili:

| Tappo Plug                           | MICRO                                                                             | STD                                                                                 | XL                                                                                  |
|--------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                      | Ø from 1 to 10 mm                                                                 | Ø from 5 to 22 mm                                                                   | Ø from 13 to 42 mm                                                                  |
| Diametro<br>tubo<br>Hose<br>diameter |  |  |  |

### Confezioni:

Colore verde per settore oleodinamico e industriale, colore bianco per settore alimentare

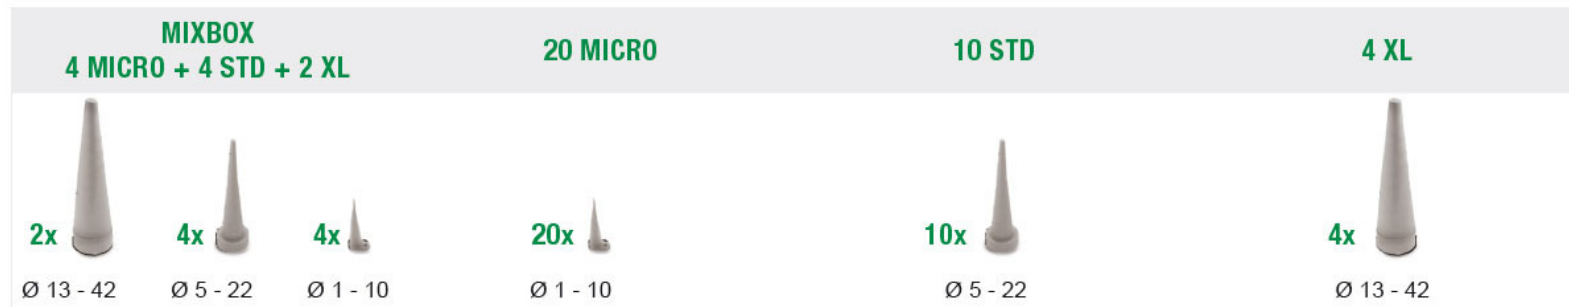

| Code            |                |              |             | Application |
|-----------------|----------------|--------------|-------------|-------------|
| TAPPOSPMIXBOX   | TAPPOSPMICRO   | TAPPOSPSTD   | TAPPOSPXL   | Hydraulics  |
| TAPPOSPMIXBOXAL | TAPPOSPMICROAL | TAPPOSPSTDAL | TAPPOSPXLAL | Food        |

Istruzioni:

1. Inserire
2. Spingere
3. Spingere e girare



#### Guida della compatibilità chimica:

| Chemical Resistance |      |
|---------------------|------|
| Acid, Diluite       | Good |

|                                   |                   |
|-----------------------------------|-------------------|
| Acid, Concentrated                | Poor to Fail      |
| Acid, Organic (diluite)           | Good              |
| Acid, Organic (concentrated)      | Poor              |
| Acid, Inorganic                   | Fair to Good      |
| Alcohol's                         | Fair to Good      |
| Aldehydes                         | Poor to fail      |
| Alkalies, Diluite                 | Good              |
| Alkalies, Concentrated            | Poor to Good      |
| Amines                            | Poor              |
| Animal & Vegetable Oils           | Good to Excellent |
| Brake Fluids, Non-Petroleum Based | Poor              |

|                             |                   |
|-----------------------------|-------------------|
| Diester Oils                | Fair to           |
| Esters, Alkyl Phosphate     | Poor              |
| Esters, Aryl Phosphate      | Poor to Fair      |
| Ethers                      | Poor              |
| Fuel, Aliphatic Hydrocarbon | Good to Excellent |
| Fuel, Aromatic Hydrocarbon  | Fair to Good      |
| Fuel, Extended (Oxygenated) | Fair to Good      |
| Halogenated Solvents        | Poor              |
| Hydrocarbon, Halogenated    | Poor to Fair      |
| Ketones                     | Poor              |
| Lacquer Solvents            | Fair              |

|                        |                   |
|------------------------|-------------------|
| LP Gases & Fuel Oils   | Excellent         |
| Mineral Oils           | Excellent         |
| Oil Resistant          | Good to Excellent |
| Petroleum Aromatic     | Good              |
| Petroleum Non-Aromatic | Excellent         |
| Refrigerant Ammonia    | Good              |
| Silicone Oil           | Good              |
| Solvent Resistant      | Good to Excellent |
|                        |                   |
| Thermal Properties     |                   |
| Low Temperature Range  | - 55°C to - 15°C  |

|                                     |                    |
|-------------------------------------|--------------------|
| Minimun for Continuous Use (static) | - 40°C             |
| Brittle Point                       | - 55°C to - 15°C   |
| High Temperature Range              | + 100°C to + 125°C |
| Maximum for Continuous Use (static) | + 125°C            |
|                                     |                    |
| <b>Environmental Performance</b>    |                    |
| Colorability                        | Excellent          |
| Flame Resistance                    | Poor               |
| Gas Permeability                    | Fair to Excellent  |
| Odor                                | Good               |
| Ozone Resistance                    | Fair to Good       |

|                       |                   |
|-----------------------|-------------------|
| Oxidation Resistance  | Good              |
| Radioation Resistance | Fair to Good      |
| Steam Resistance      | Fair to Good      |
| Sunlight Resistance   | Poor to Good      |
| Taste Retention       | Fair to Good      |
| Weather Resistance    | Fair to Good      |
| Water Resistance      | Good to Excellent |

Per maggiori informazioni sugli optional contattare l'ufficio vendite ([vendite@zecspa.com](mailto:vendite@zecspa.com))