


Palletizing Gripper

ARPG - Bag Gripper

Applied Robotics Palletizing Gripper (ARPG) – Bag Gripper provides rapid pick-and-place palletizing of bagged products, offering complete robotic control of a palletizing cell.

Advantages:

- High Energy Density (Payload to Gripper Weight Ratio)
 - Doesn't require large robots to palletize lightweight bags.
- Versatility
 - Gripper width easily adjusts and locks with our patented Self-Locking Rotary Handwheel.
- Failsafe Payload Support
 - Will not lose payload during loss of power or air.
- Robustness
 - Engineered construction with select materials provides maximum strength in any industrial environment.
- Bag Present Sensor
 - Provides assurance that the bag is within the grasp of the gripper.

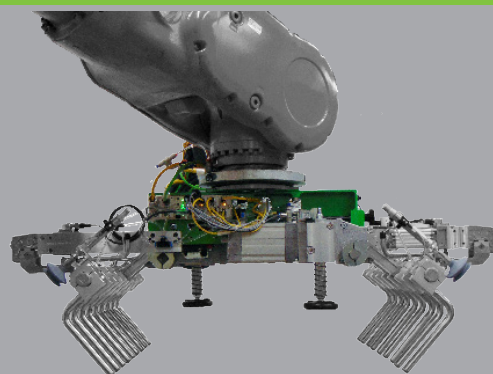

SPECIFICATIONS

Model	Rated Payload	Recommended Maximum Bag Length		Bag Width	Bag Height	Gripper Weight
	kg (lb)	mm (in)		mm (in)	mm (in)	kg (lb)
ARPG15	15 (33)	600 (23.62)		200 - 375 (7.87 - 14.76)	75 - 150 (2.95 - 5.91)	20 (44.1)
ARPG30	30 (66)	750 (29.53)		300 - 500 (11.81 - 19.69)	75 - 150 (2.95 - 5.91)	26 (57.3)
ARPG30-L	30 (66)	1,050 (42.34)		300 - 500 (11.81 - 19.69)	75 - 150 (2.95 - 5.91)	29 (63.9)
ARPG50	50 (110)	900 (35.43)		400 - 600 (15.75 - 23.62)	100 - 200 (3.94 - 7.87)	44 (97.0)
ARPG50-L	50 (110)	1,050 (41.34)		400 - 600 (15.75 - 23.62)	100 - 200 (3.94 - 7.87)	46 (101.4)


Bags Per Minute: 30 BPM

Noise Emissions (Sound Pressure): ≤ 70 dB(A) in any direction


Operating Temperature: 5 – 60 °C (41 – 140 °F)

Operating Pressure: 4 – 6 bar (58 – 87 psi)


OPTIONS




Pallet Picker
Enables picking and placing of standard empty pallets without interrupting palletizing cycle.



Sheet Picker
Allows picking and placing of any type of sheet via suction cups.

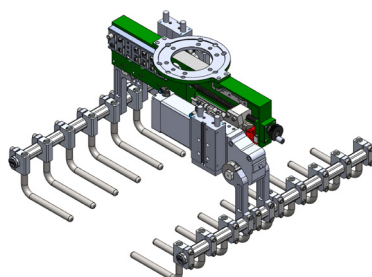

Pneumatic Pusher
Offers controlled clamping and releasing through the use of pneumatic cylinders, as well as giving the same amount of force on all bags, regardless of bag thickness.



Servo Bag Width Adjustment
Provides on-the-fly bag width adjustment so that multiple bag widths can be palletized without the need for operator intervention.





Applied Robotics
Solutions in reach

Applied Components
tecnomors

GRIP

PRODUCT INFORMATION

ARPG

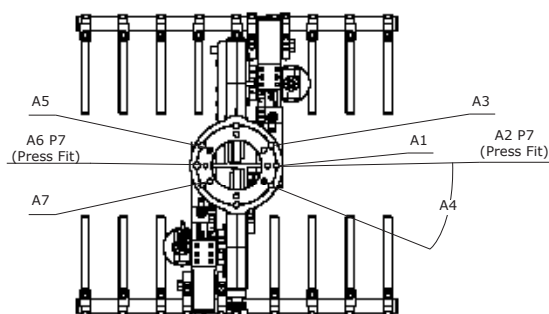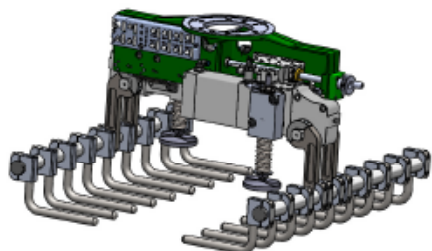


COMMUNICATIONS
(4-Pin D-Coded M12 Ethernet/IP)
(4-Pin D-Coded M12 Profinet)


POWER
(5-Pin L-Coded M12 Ethernet/IP)
(5-Pin L-Coded M12 Profinet)

B1
(Min Bag Width)

C7
(Adjustable Pitch)

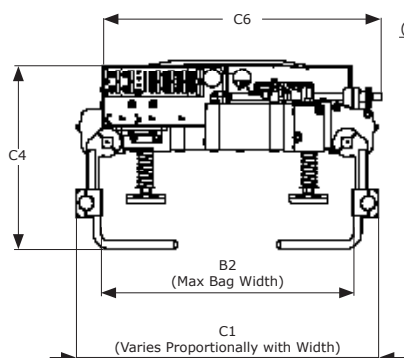

AIR INPUT
(6mm Push-to Connection)

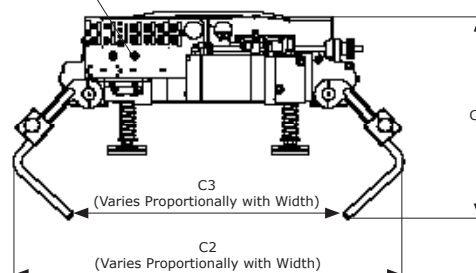

Model	Mounting Information							Opening Range (Bag Width, BW)		Informational Dimensions								
	A1	A2	A3	A4	A5	A6	A7	B1	B2	C1	C2	C3	C4	C5	C6	C7	C8	C9
ARPG15	160 (6.30)	12 (0.47)	12.5 (0.49)	30°	125 (4.92)	10 (0.39)	10.5 (0.41)	200 (7.9)	375 (14.8)	BW+106 (BW+4.2)	BW+311.8 (BW+12.3)	BW+151.7 (BW+6.0)	415 (16.3)	420 (16.5)	563 (22.1)	16 - 200 (0.6 - 7.8)	15.88 (0.625)	494.8 (19.5)
ARPG30	160 (6.30)	12 (0.47)	12.5 (0.49)	30°	125 (4.92)	10 (0.39)	10.5 (0.41)	300 (11.8)	500 (19.7)	BW+106 (BW+4.2)	BW+284.9 (BW+11.2)	BW+50.5 (BW+2.0)	420 (16.5)	420 (16.5)	563 (22.1)	16 - 200 (0.6 - 7.8)	15.88 (0.625)	646.8 (25.5)
ARPG30-L	160 (6.30)	12 (0.49)	12.5 (0.49)	30°	125 (4.92)	10 (0.39)	10.5 (0.41)	300 (11.8)	500 (19.7)	BW+106 (BW+4.2)	BW+284.9 (BW+11.2)	BW+50.5 (BW+2.0)	420 (16.5)	420 (16.5)	563 (22.1)	16 - 200 (0.6 - 7.8)	15.88 (0.625)	1007.4 (39.7)
ARPG50	160 (6.30)	12 (0.47)	12.5 (0.49)	30°	125 (4.92)	10 (0.39)	10.5 (0.41)	400 (15.7)	600 (23.6)	BW+106 (BW+4.2)	BW+352.5 (BW+13.9)	BW+43.8 (BW+1.7)	525 (20.7)	635 (25.0)	636 (25.0)	16 - 200 (0.6 - 7.8)	15.88 (0.625)	806.8 (31.8)
ARPG50-L	160 (6.30)	12 (0.47)	12.5 (0.49)	30°	125 (4.92)	10 (0.39)	10.5 (0.41)	400 (15.7)	600 (23.6)	BW+106 (BW+4.2)	BW+352.5 (BW+13.9)	BW+43.8 (BW+1.7)	525 (20.7)	635 (25.0)	636 (25.0)	16 - 200 (0.6 - 7.8)	15.88 (0.625)	1007.4 (39.7)

* Dimensions are in millimeters (inches).

** All dimensions are descriptive and subject to variation for technical upgrading. We reserve the right to make variations without prior notification.



Applied Robotics
648 Saratoga Road
Glenville, NY 12302 USA
Tel. +1 518 384 1000 Fax +1.5183841200
info@appliedrobotics.com
www.appliedrobotics.com



EFFECTO GROUP S.p.A.
Via Roma, 141/143
28017 San Maurizio d'Opaglio (NO) - Italy
Tel. +39 0322 96142 Fax +39 0322 967453
info@effectogroup.com
www.effectogroup.com



02.2021_Rev.05_EU