



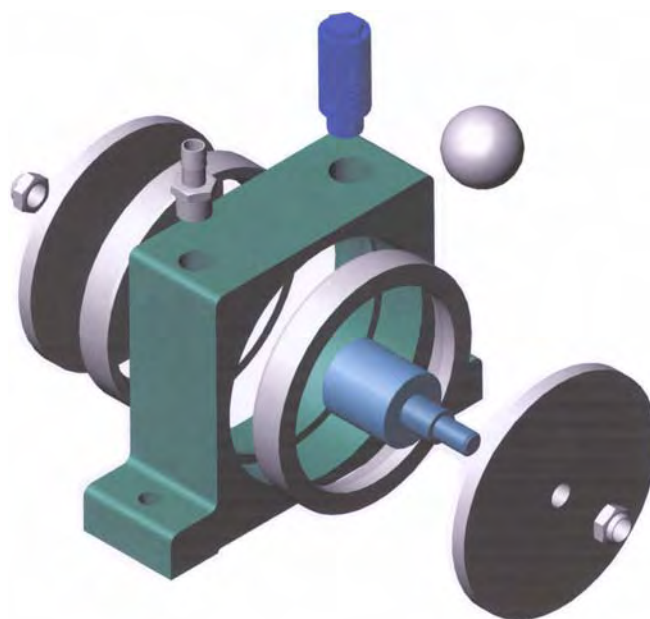

VIBRATORI INDUSTRIALI SERIE VK

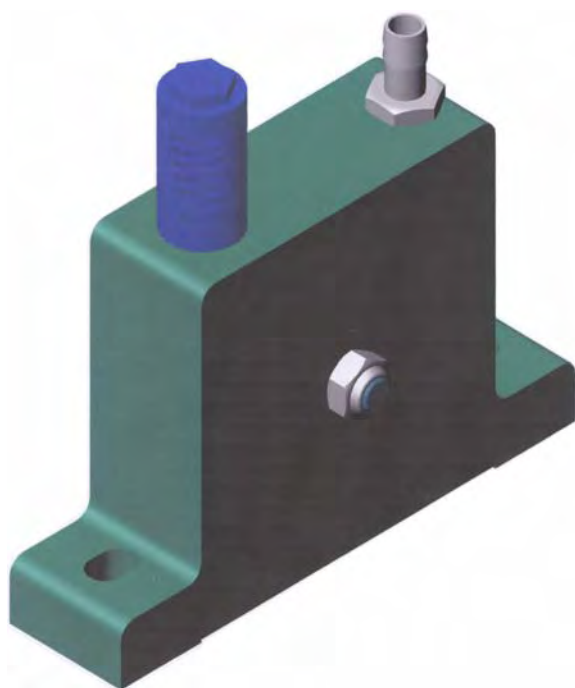

Avviamento rapido

Alte frequenze

Lubrificazione minima

Piccolo ingombro


Disponibili anche con certificazione

ATEX.

Ex II 3 D T 5

Tipo	Giri/min	Forza Cent. (N)	Consumo d'aria (l/min)	Peso (kg)
VK 8	30.500	440	175	0.32
VK 10	27.500	520	175	0.32
VK 14	19.700	950	200	0.32
VK 16	17.000	1.260	225	0.73
VK 22	15.000	2.160	275	0.75
VK 26	14.200	4.370	380	1.92
VK 30	10.000	5.250	500	1.96
VK 35	6.000	7.060	625	3.92
VK 40	5.000	8.620	745	3.98

La frequenza e la forza diminuiscono con montaggi meno rigidi.
I dati sono intesi a una pressione di 6 bar.

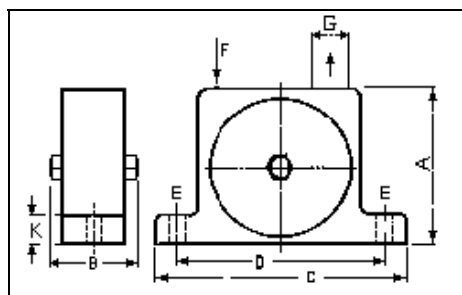

Tipo	Quote (mm)							
	A	B	C	D	E	F	G	K
VK 8-14	55	37	90	68-73	7	1/8"	1/8"	12
VK 16-22	80	49	128	104	9	1/4"	1/4"	16
VK 26-30	110	63	170	130-140	11	3/8"	3/8"	20
VK 32-40	140	80	200	170	11	3/8"	1/2"	24