BOCKROLLE

Ausführung mit Rückenloch; für optionale Adapterplatte F

Beschreibung belastbare und laufruhige Bockrolle, spurlos (außer Vollgummi elektrostatisch entladend), kugelgelagert* mit Fadenschutz zur Befestigung an Aluminiumprofilen; kombinierbar mit allen Lenk- und Bockrollen durch gleiches Höhenniveau mit optionaler Adapterplatte F; keine zusätzliche Transport- und Fußplatte notwendig

Material Gehäuse: Stahl
Laufbelag: siehe Tabelle
Radkörper: siehe Tabelle

Farbe Gehäuse: alufarbig
Laufbelag: siehe Tabelle
Radkörper: schwarz, grau ≈ RAL 7001

Liefereinheit 1 Stück

Extras weitere Rollenarten, weitere Farben, weitere Oberflächen auf Anfrage

FIXED CASTOR

Model *With bolt hole; compatible with optional adapter plate F*

Description *Reliable and quiet fixed castor, trackless (except solid rubber electrostatically discharging), with ball bearings* and thread guard; can be fixed to aluminum profiles; compatible with all swivel and fixed castors due to consistent height level with optional adapter plate F; no additional transport and base plate needed*

Material *Housing: Steel*
Tread: See table
Wheel body: See table

Color *Housing: Alu color*
Tread: See table
Wheel body: Black, gray ≈ RAL 7001

Pack Quantity *1 piece*

Specials *Other kinds of wheels, other colors, other surfaces on request*

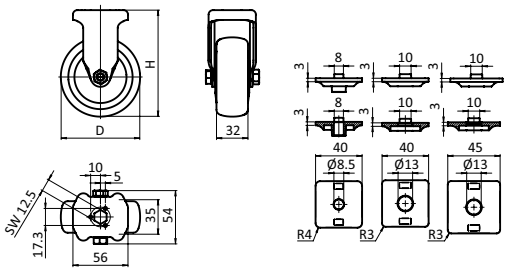

Bockrolle Laufbelag *Fixed Castor Tread*	D [mm]	H [mm]	ESD	Radkörper *Wheel Body*	Tragkraft [N] *Max. Load [N]*	Gewicht [g] *Weight [g]*	Teil-Nr. *Part #*
TPE, grau ≈ RAL 7031 *TPE, gray*	80	108		PP, grau *PP, gray*	1000	323.0	**098F080TN**
	100	133		PP, grau *PP, gray*	1100	390.0	**098F100TN**
	125	158		PP, grau *PP, gray*	1200	472.0	**098F125TN**
	80	108	ESD	PP, schwarz *PP, black*	650	353.0	**098F080TNESD**
	100	133	ESD	PP, schwarz *PP, black*	700	439.0	**098F100TNESD**
	125	158	ESD	PP, schwarz *PP, black*	800	536.0	**098F125TNESD**
TPU, grau ≈ RAL 7024 *TPU, gray*	80	108		PA, grau *PA, gray*	1200	353.0	**098F080UN**
	100	133		PA, grau *PA, gray*	1200	426.0	**098F100UN**
	125	158		PA, grau *PA, gray*	1200	522.0	**098F125UN**
	80	108	ESD	PA, schwarz *PA, black*	1000	336.0	**098F080UNESD**
	100	133	ESD	PA, schwarz *PA, black*	1200	401.0	**098F100UNESD**
	125	158	ESD	PA, schwarz *PA, black*	1200	485.0	**098F125UNESD**
Vollgummi, grau ≈ RAL 7001 *Solid rubber, gray*	80	108		PA, schwarz *PA, black*	800	353.0	**098F080GN**
	100	133		PA, schwarz *PA, black*	1100	488.0	**098F100GN**
	125	158		PA, schwarz *PA, black*	1000	605.0	**098F125GN**
Vollgummi, schwarz *Solid rubber, black*	80	108	ESD	PA, schwarz *PA, black*	600	336.0	**098F080GNESD**
	100	133	ESD	PA, schwarz *PA, black*	800	452.0	**098F100GNESD**
	125	158	ESD	PA, schwarz *PA, black*	750	555.0	**098F125GNESD**
PA, schwarz; *gleitgelagert *PA, black; *with slide bearings*	80	108		PA, schwarz *PA, black*	1000	261.0	*** 098F080AN**
	100	133		PA, schwarz *PA, black*	1200	377.0	**098F100AN**
	125	158		PA, schwarz *PA, black*	1200	440.0	**098F125AN**